
Vehicle (Year/Make/Model) '07 Five Hundred/Freestyle/Montego	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 1 of 4	Revision Date 8/18/06

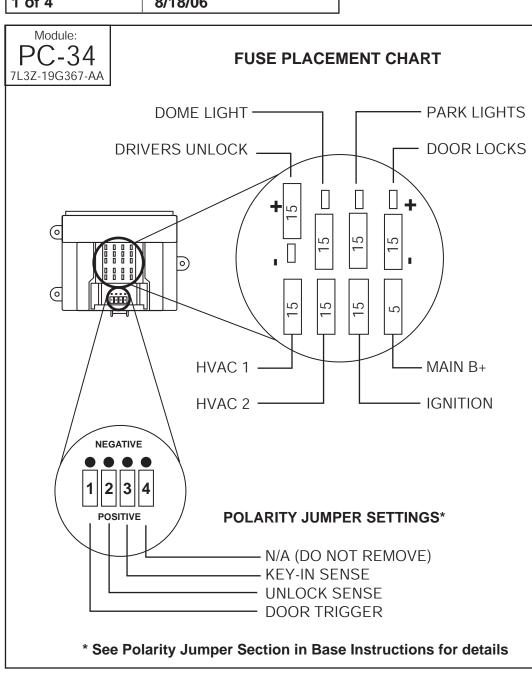

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)


### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON

Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.


Note 2: See the Optional Connections / Features page

# **MODULE MOUNTING LOCATION:**

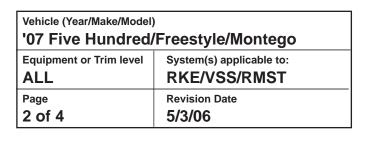


### **DRIVER'S SIDE KICK PANEL HARNESS**


	Color	Function
A-5	BLACK	Ground
C-12	GREEN/WHITE	Memory Seat 1 Output
C-13	YELLOW/GREEN	Memory Seat 2 Output

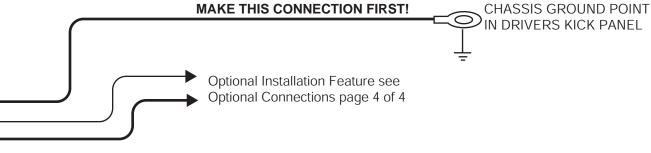


# **STEERING COLUMN HARNESS**

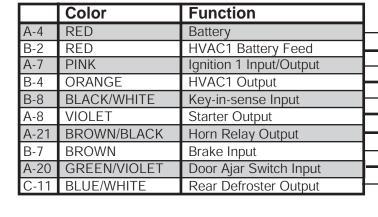


Optional Installation Feature see Optional Connections page 4 of 4

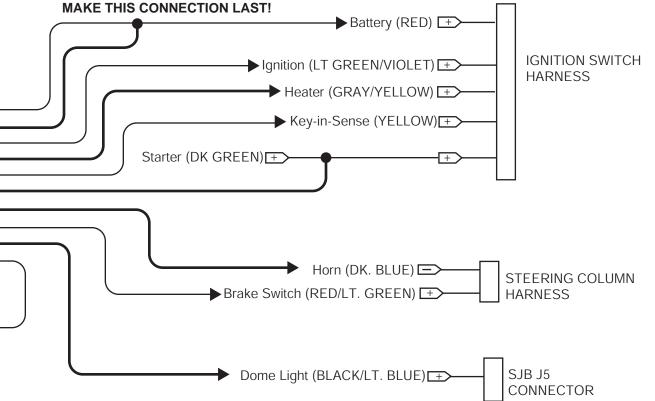

See "SJB Layout" page for connector locations.

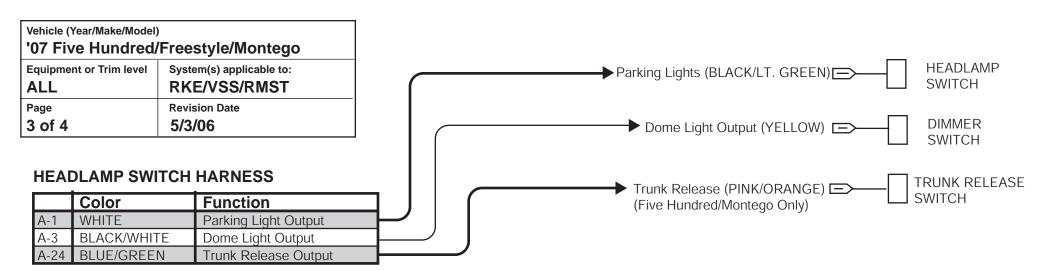

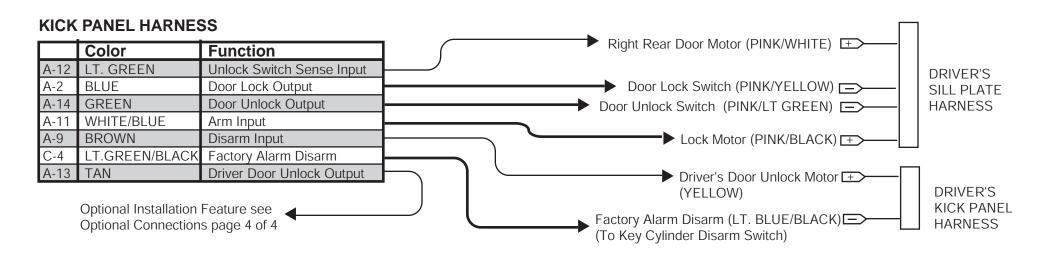



Vehicle (Year/Make/Model) '07 Five Hundred/Freestyle/Montego	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 4 of 4	Revision Date 5/3/06

# **OPTIONAL CONNECTIONS / FEATURES**

## **OPTION PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
2	8	DRIVER UNLOCK RELAY	ON
3	1	DRIVER PRIORITY UNLOCK	ON

# **DRIVER'S DOOR PRIORITY UNLOCK**

		Color	Function	
(	C-9	TAN/RED	Driver Door Unlock Switch	
_	A-13	TAN	Driver Door Unlock Motor	HARNESS
,	A-9	BROWN	Disarm Input	To Driver Door Unlock Motor  (YELLOW)  TO Driver Door Unlock Motor  (YELLOW)  TO Driver Door Unlock Motor  (YELLOW)
				w/Factory RKE only  Connect to the half of the wire going to the back of the vehicle


# **REAR DEFROSTER**

				STEERING COLUMN
	Color	Function	Rear Defroster (PINK)	HARNESS TO CLIMATE
C-11	BLUE/WHITE	Rear Defroster Output		CONTROL HEAD

### **MEMORY SEATS**

	Color	Function	→ Memory Seat 1 (BROWN/LT GREEN) →		DRIVER'S SIDE
C-12	GREEN/WHITE	Memory Seat 1 Output			KICK PANEL
C-13	YELLOW/GREEN	Memory Seat 2 Output	→ Memory Seat 2 (BLACK/ORANGE) □		HARNESS

Vehicle (Year/Make/Model) '07 Five Hundred/Freestyle/Montego		
Equipment or Trim level	System(s) applicable to:	
Page 1 of 2	Revision Date 8/18/06	

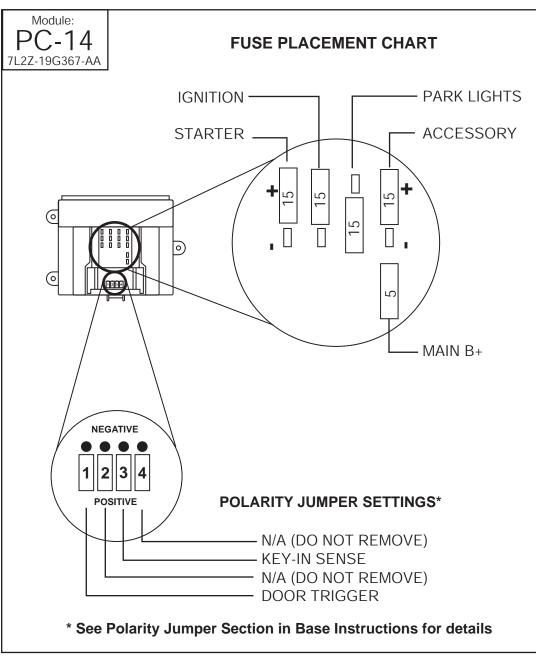

RMST Kit:

7L2Z-19G364-AA


Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - included)

### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

### **MODULE MOUNTING LOCATION:**

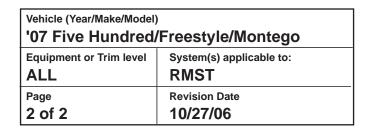

## **STEERING COLUMN HARNESS**

	Color	Function
A-3	PINK	Ignition Input/Output
A-2	ORANGE	HVAC Output
A-13	VIOLET	Starter Output
B-8	BLACK/WHITE	Key-in-sense Input
A-4	RED	Battery

	Color	Function
A-21	BROWN/BLACK	Horn Relay Output
B-7	BROWN	Brake Input

# ► Horn (DK. BLUE) 🖃 **HARNESS BRAKE** Brake (RED/LT. GREEN) \_\_\_ **SWITCH**

**IGNITION** 


**SWITCH** 

**STEERING** 

COLUMN

# **DRIVER'S KICK PANEL HARNESS**

	Color	Function
A-5	BLACK	Ground
A-24	BLUE	Door Lock Output
A-1	WHITE	Parking Light Output
A-20	GREEN/VIOLET	Door Ajar Switch Input

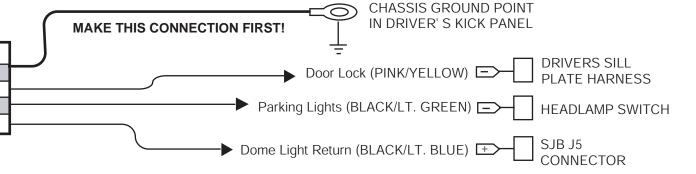

# **UNDER HOOD HARNESS**


	Color	Function	Venicle Interior	Engine Compartment		Hood Tilt Switch
A-19	GRAY	Hood Open Switch Input			Chassis Ground Do Not Ground to Hood!	HOOD THE SWILLIN

USE TYPE "A" CUSTOM WIRE HARNESS

**VEHICLE** 

**HARNESS** 

Vehicle (Year/Make/Model) '07 Five Hundred/Freestyle/Montego	
Equipment or Trim level	System(s) applicable to:
Page 1 of 2	Revision Date 10/27/06

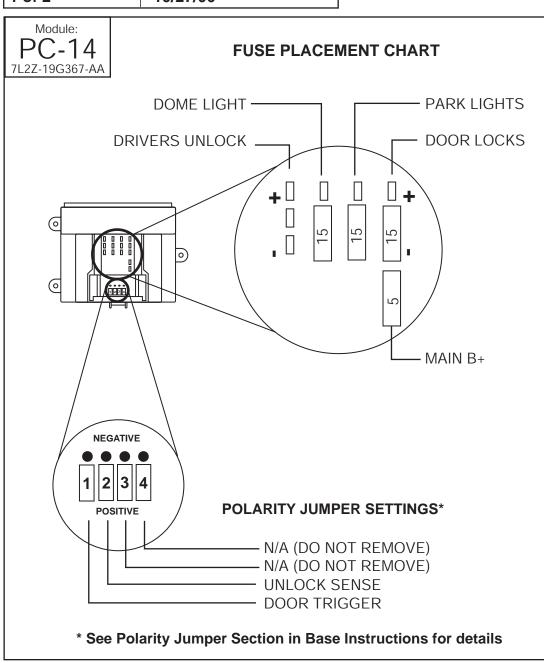

### VSS Kit:

7L3Z-19A361-AA

### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	3 DOOR AJAR INVERT ON		ON
1	4	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

# **MODULE MOUNTING LOCATION:**


Left Side of Driver's Underdash

### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

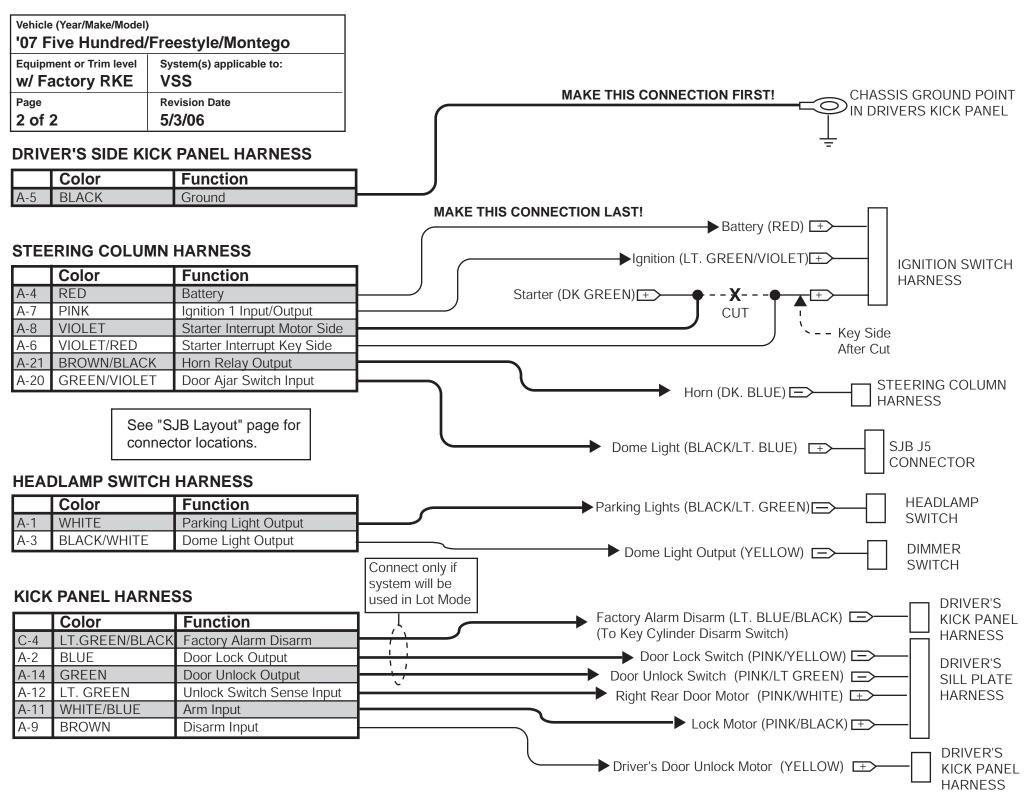


Vehicle (Year/Make/Model)		
'07 Five Hundred/Freestyle/Montego		
Equipment or Trim level	System(s) applicable to:	
ALL	ALL	
Page	Revision Date	
1 of 1	5/3/06	

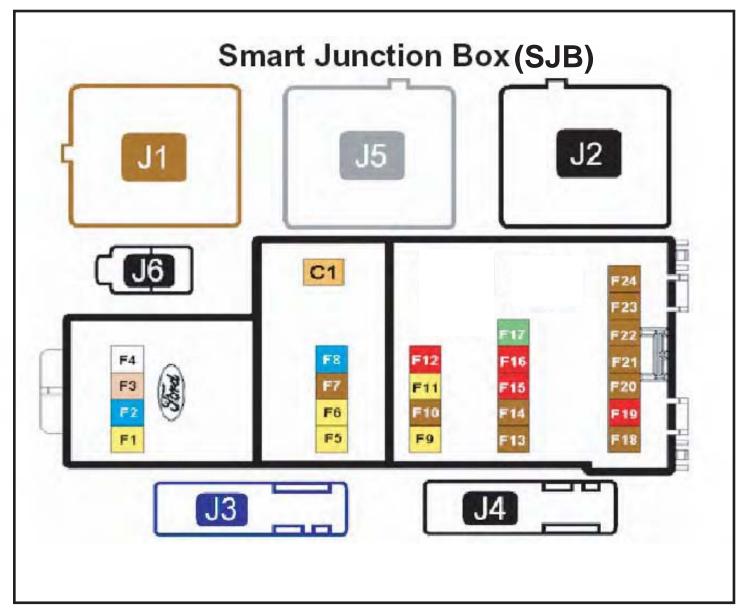

**Location: Behind Driver's Side Lower Dashboard Panel** 

Vehicle (Year/Make/Model) '07 Focus	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 1 of 5	Revision Date 8/18/06

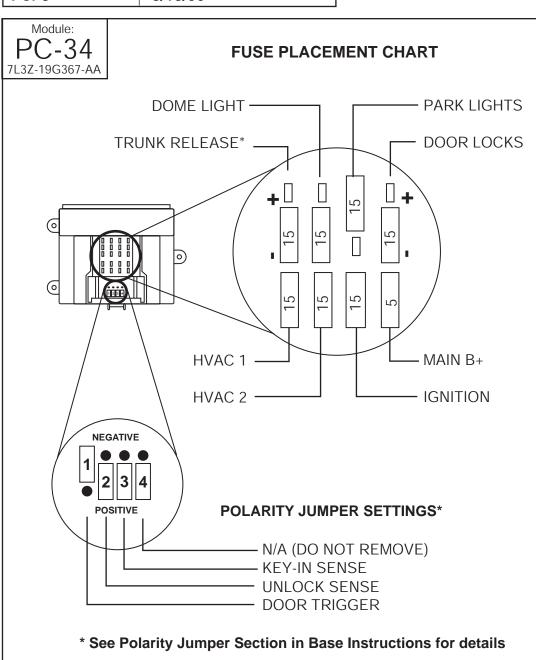

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)

# **RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):**


- 3- Power Window & Moonroof Interrupt Circuits
- 1- Headlights (optional)


### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON

- Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.
- Note 2: See the Optional Connections / Features page

### MODULE MOUNTING LOCATION:

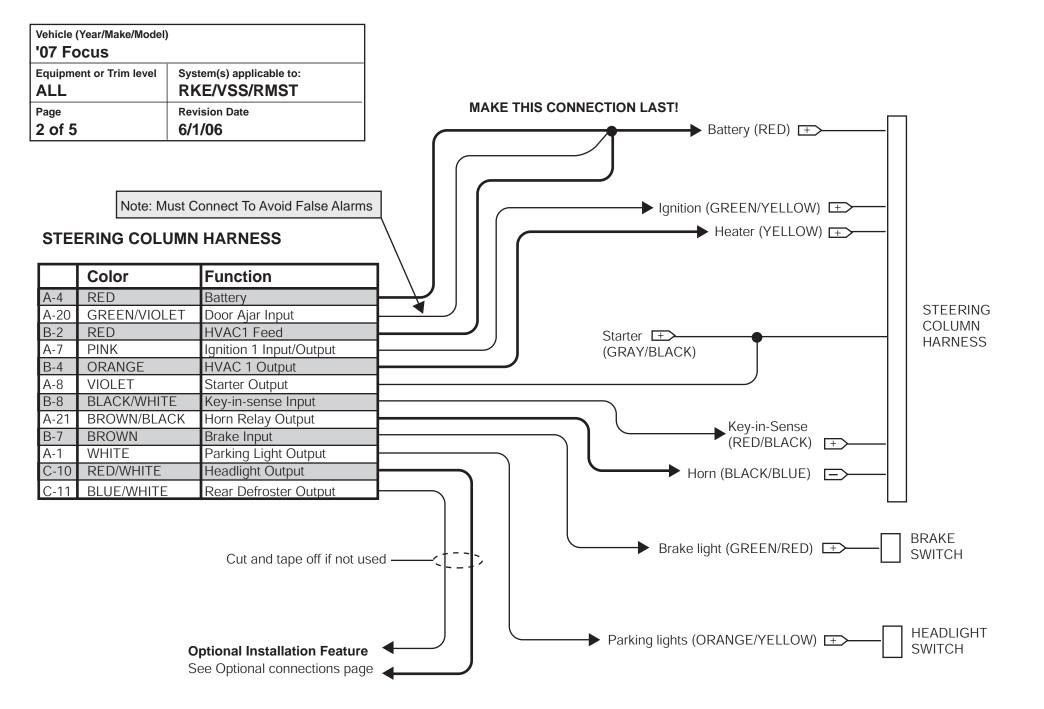

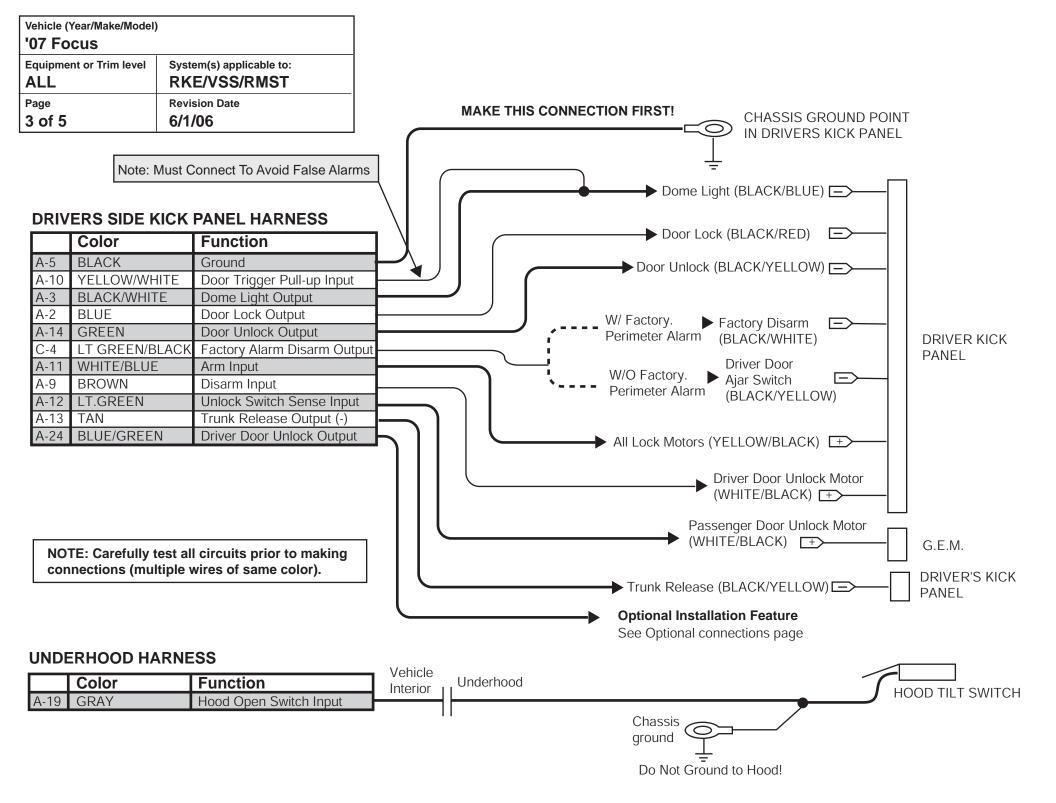

Vehicle (Year/Make/Model) '07 Focus	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page	Revision Date
4 of 5	6/1/06

# **OPTIONAL CONNECTIONS / FEATURES**

### **OPTION PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
3	1	DRIVER PRIORITY UNLOCK	ON

# **DRIVER'S DOOR PRIORITY UNLOCK**

	Color	Function
A-24	BLUE/GREEN	Driver Door Unlock Output




#### **IMPORTANT!**

The relay wire colors shown here, are the colors used on the FORD accessory relay kits listed above. Wire colors on other relays may be different!


### **HEADLIGHT ILLUMINATION / REAR DEFROSTER**

	Color	Function
C-10	RED/WHITE	Headlight Output
C-11	BLUE/WHITE	Rear Defroster Output

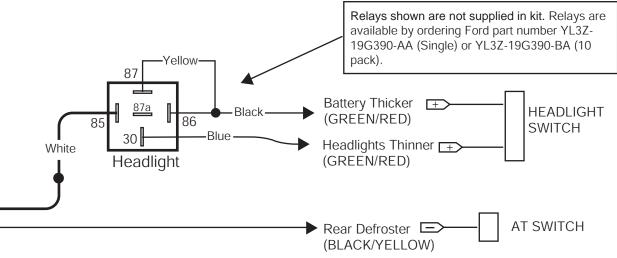


Vehicle (Year/Make/Model) '07 Focus	
Equipment or Trim level System(s) applicable to:  ALL RKE/VSS/RMST	
Page 5 of 5	Revision Date 6/1/06

# POWER WINDOW AND SUNROOF INTERRUPTS

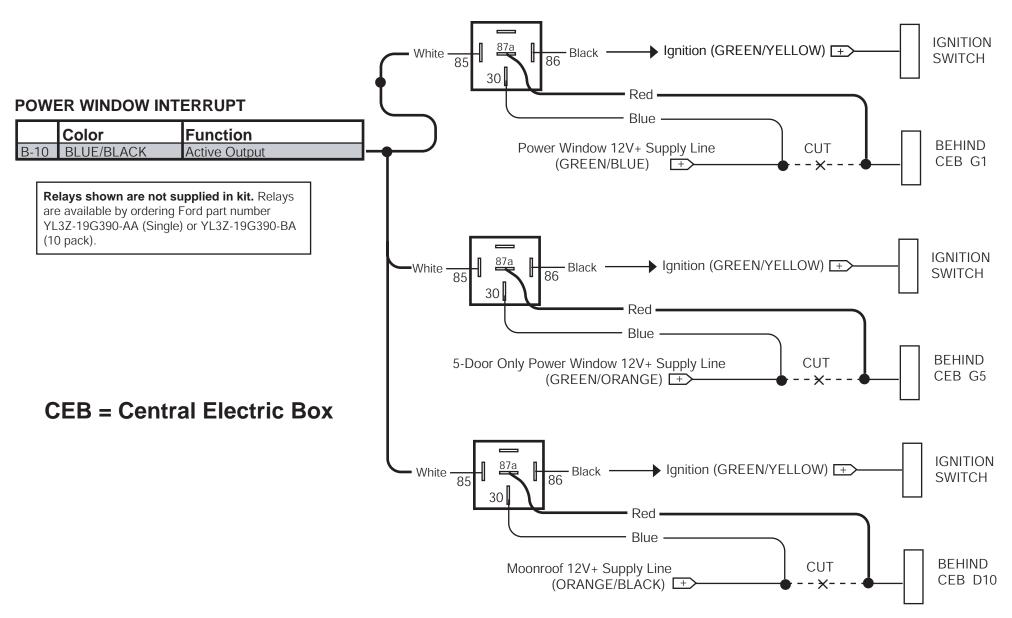

**CAUTION: REMOVE YELLOW WIRE AND TERMINAL FROM RELAY SOCKETS** 

Vehicle (Year/Make/Model) '07 Focus	)
Equipment or Trim level	System(s) applicable to:
Page	Revision Date
1 of 3	8/18/06

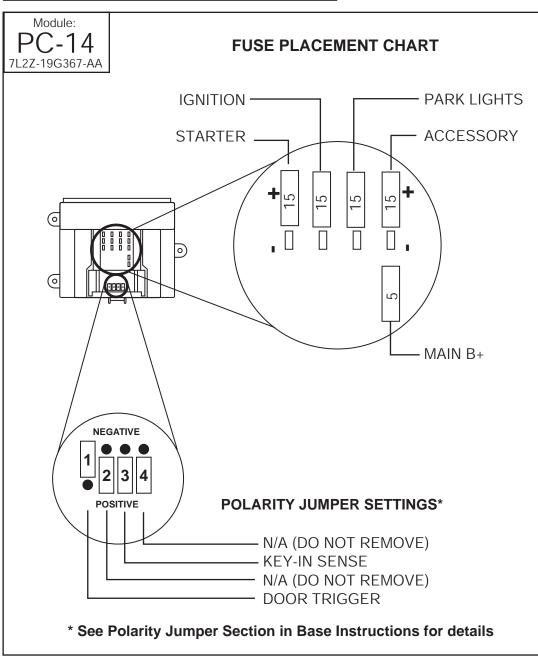

#### RMST Kit:

7L2Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - included)


# RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):

3- Power Window & Moonroof Interrupt Circuits

### **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

# **MODULE MOUNTING LOCATION:**

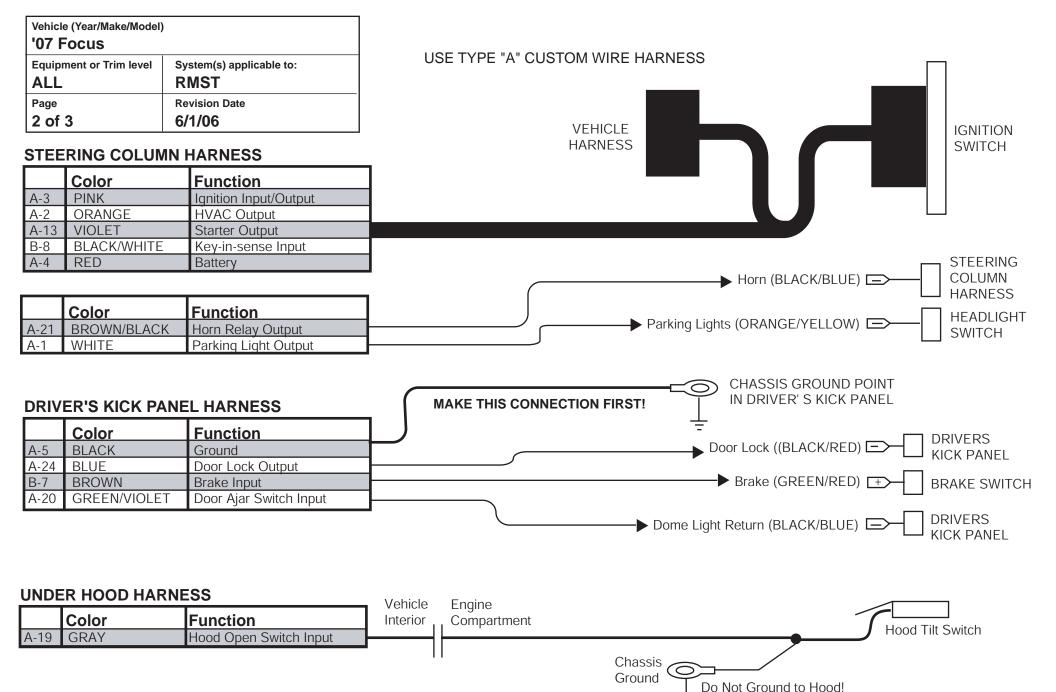


Vehicle (Year/Make/Model) '07 Focus	)
Equipment or Trim level	System(s) applicable to: RMST
Page	Revision Date
3 of 3	6/1/06

# POWER WINDOW AND SUNROOF INTERRUPTS

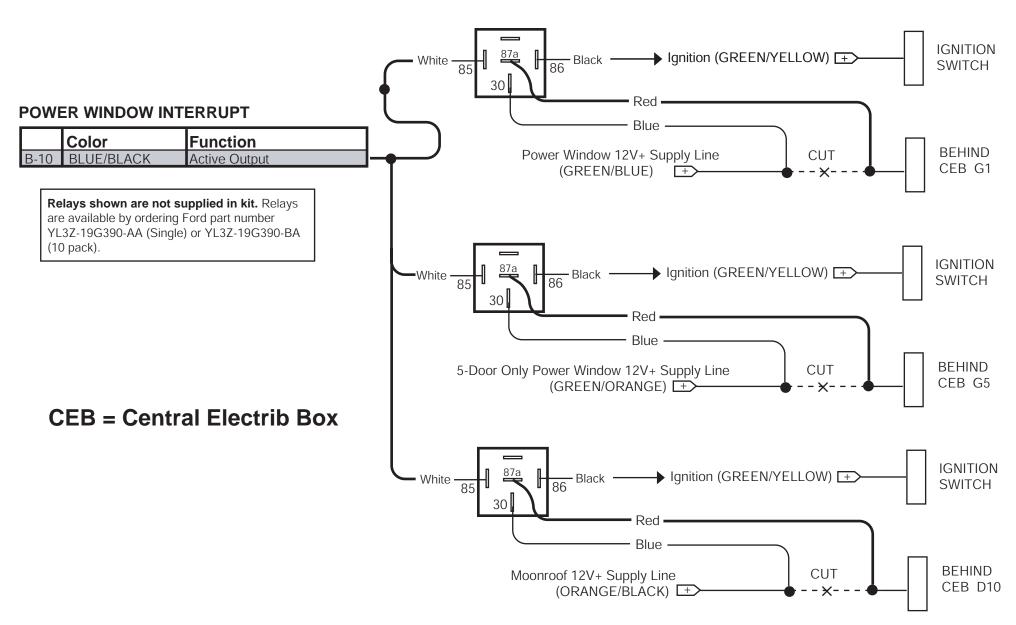

CAUTION: REMOVE YELLOW WIRE AND TERMINAL FROM RELAY SOCKETS

Vehicle (Year/Make/Model) '07 Focus	)
Equipment or Trim level	System(s) applicable to: VSS
Page 1 of 2	Revision Date 6/1/06

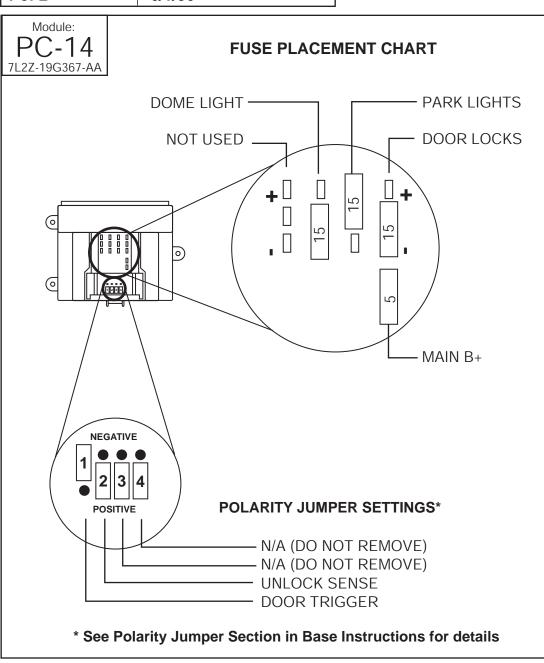

**VSS Kit:** 

7L3Z-19A361-AA

### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

### **MODULE MOUNTING LOCATION:**


Left Side of Driver's Underdash

### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

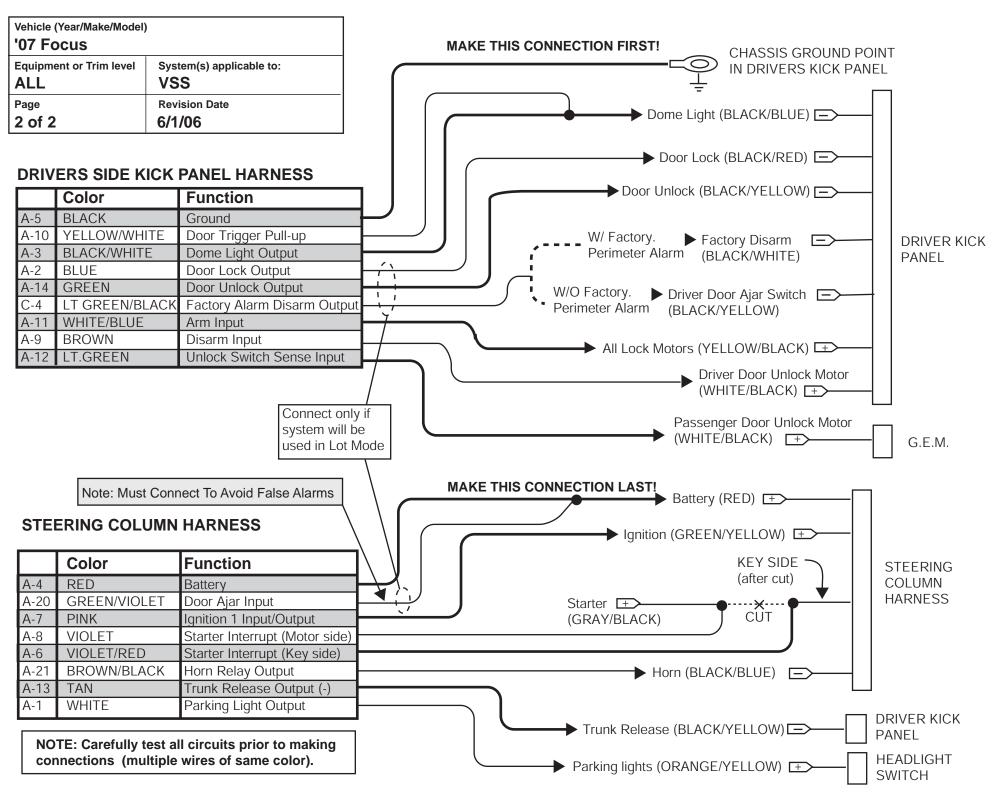

Vehicle (Year/Make/Model) '07 Fusion / Milan	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page	Revision Date
1 of 5	8/18/06

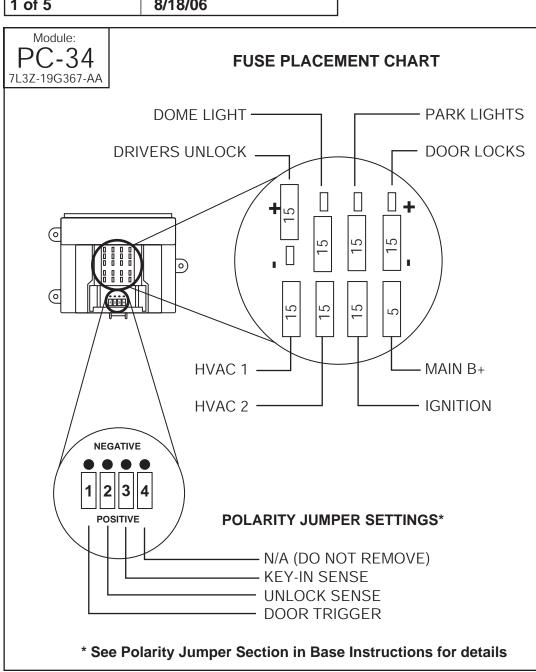

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)

### **RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):**

- 1- Parking Light Operation (all platforms)
- 1- Parking Light Operation with Autolamps (addditional relay)

### **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

Note 2: See the Optional Connections / Features page


# **MODULE MOUNTING LOCATION:**


Vehicle (Year/Make/Model) '07 Fusion / Milan	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 2 of 5	Revision Date 6/28/06

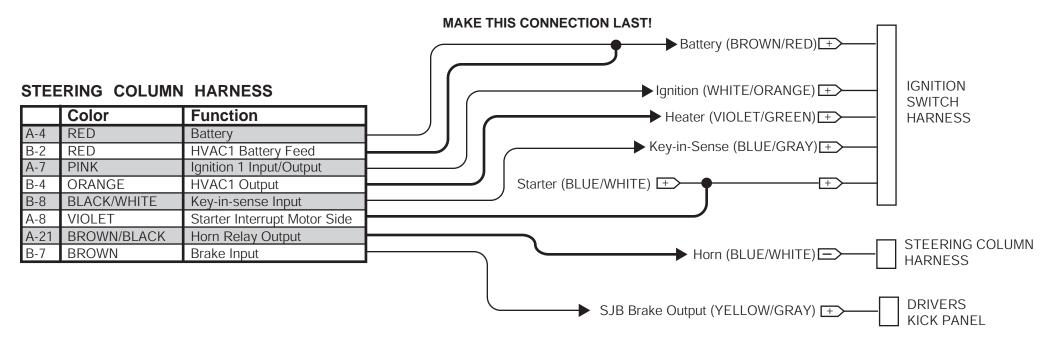

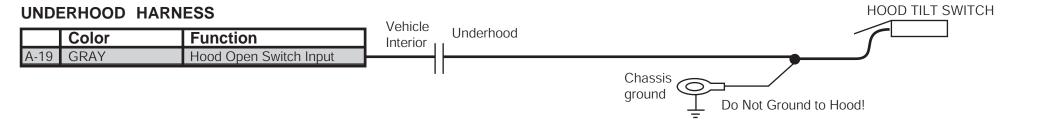

Vehicle (Year/Make/Model) '07 Fusion / Milan	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 3 of 5	Revision Date 6/28/06

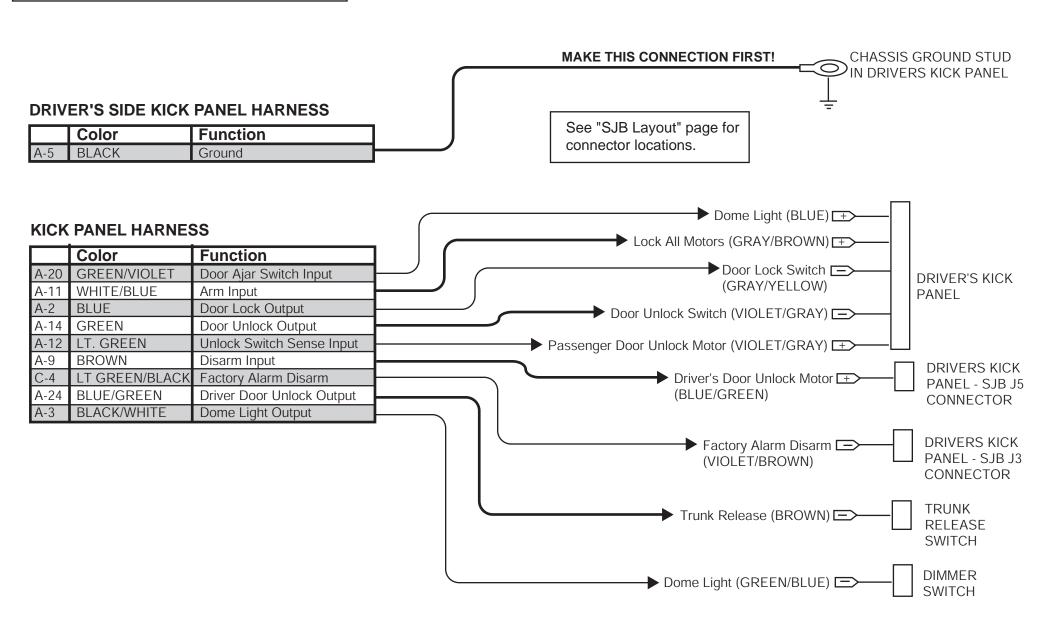

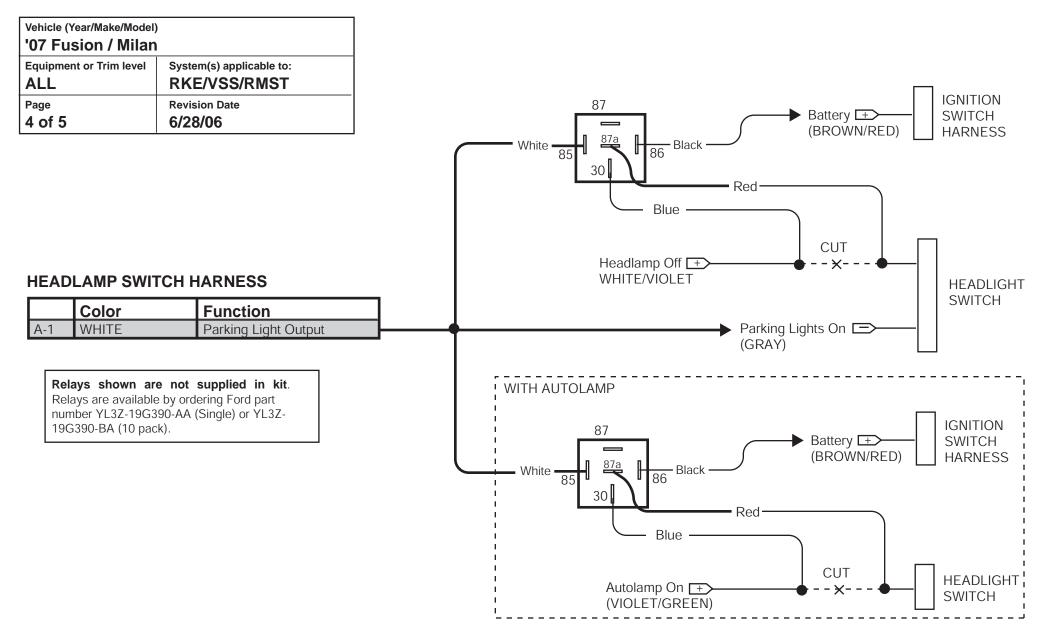


Vehicle (Year/Make/Model) '07 Fusion / Milan	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 5 of 5	Revision Date 6/28/06

# **OPTIONAL CONNECTIONS / FEATURES**

### **OPTION PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
2	8	DRIVER UNLOCK RELAY	ON
3	1	DRIVER PRIORITY UNLOCK	ON


### **DRIVER'S DOOR PRIORITY UNLOCK**

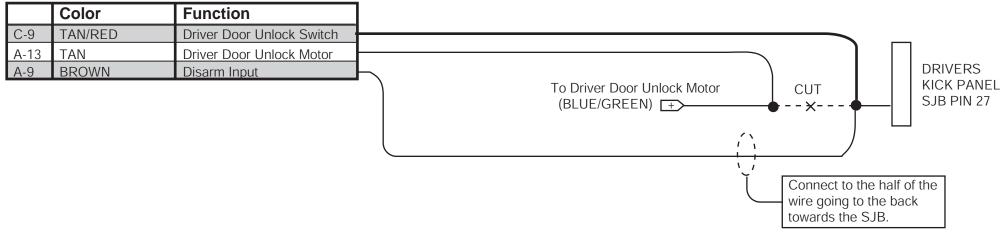

### **HEADLIGHTS/REAR DEFROSTER**

	Color	Function
C-10	RED/WHITE	Headlight Output
C-11	BLUE/WHITE	Rear Defroster Output

Vehicle (Year/Make/Model) '07 Fusion / Milan		
Equipment or Trim level System(s) applicable to:  ALL RMST		
Page 1 of 3	Revision Date 8/18/06	

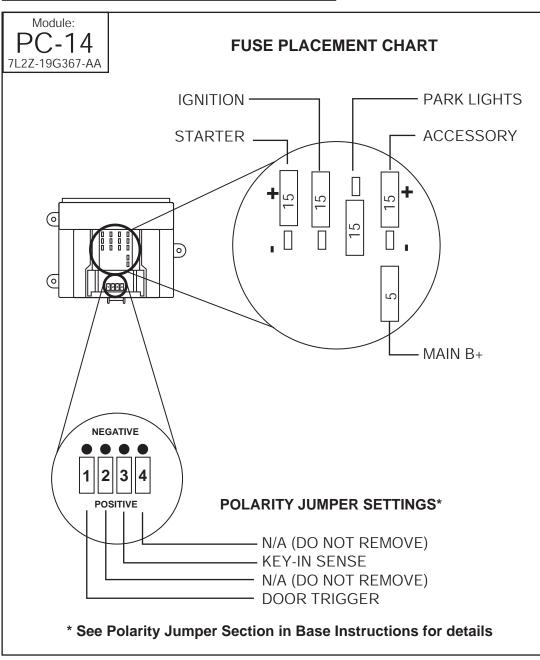

**RMST Kit:** 

7L2Z-19G364-AA


Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - included)

# **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON


### **MODULE MOUNTING LOCATION:**




# **STEERING COLUMN HARNESS**

ı		Color	Function
ı	A-3	PINK	Ignition Input/Output
	A-2	ORANGE	HVAC Output
	A-13	VIOLET	Starter Output
	B-8	BLACK/WHITE	Key-in-sense Input
	A-4	RED	Battery

	Color	Function
A-21	BROWN/BLACK	Horn Relay Output

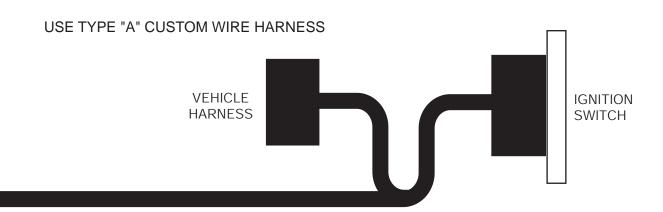



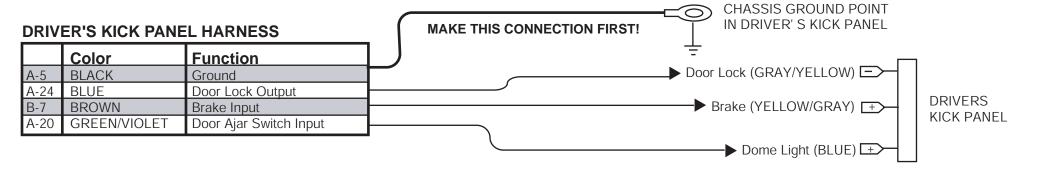

## **UNDER HOOD HARNESS**


UNDER HOOD HARNESS	Vehicle Engine		
Color Function	Interior Compa	tment	Hood Tilt Switch
A-19 GRAY Hood Open Switch Input	<u> </u>	•	HOOD THE SWILCH
	11	Chassis	
		Ground Do Not Ground to Hood!	

Vehicle (Year/Make/Model) '07 Fusion / Milan	
Equipment or Trim level w/ factory RKE	System(s) applicable to: VSS or RMST
Page 3 of 3	Revision Date 6/28/06


# **HEADLAMP SWITCH HARNESS**

	Color	Function
A-1	WHITE	Parking Light Output

Relays shown are not supplied in kit. Relays are available by ordering Ford part number YL3Z-19G390-AA (Single) or YL3Z-19G390-BA (10 pack).

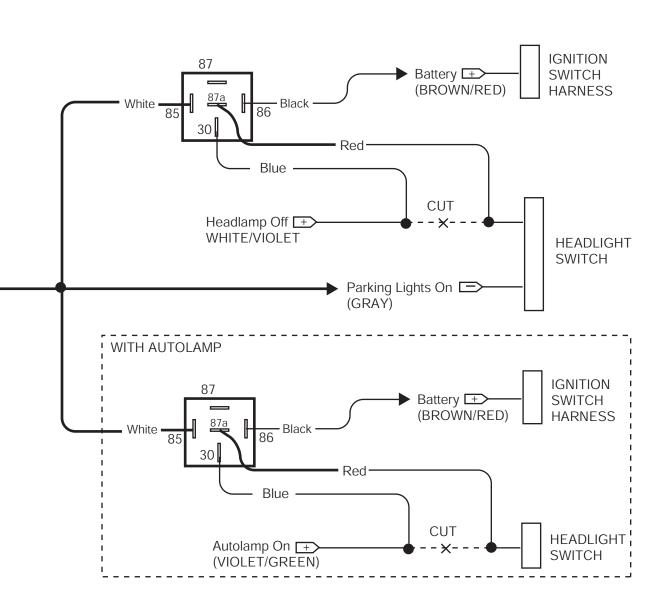

Vehicle (Year/Make/Model) '07 Fusion / Milan	
Equipment or Trim level	System(s) applicable to:
Page 1 of 3	Revision Date 6/28/06

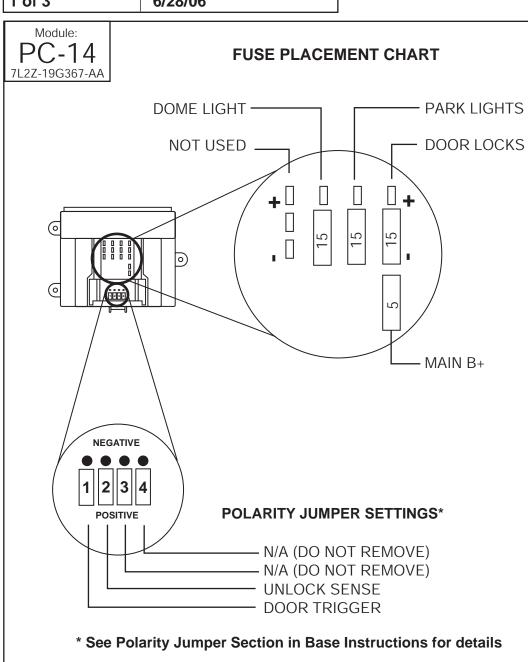

### **VSS Kit:**

7L3Z-19A361-AA

### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

### **MODULE MOUNTING LOCATION:**

Left Side of Driver's Underdash


### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

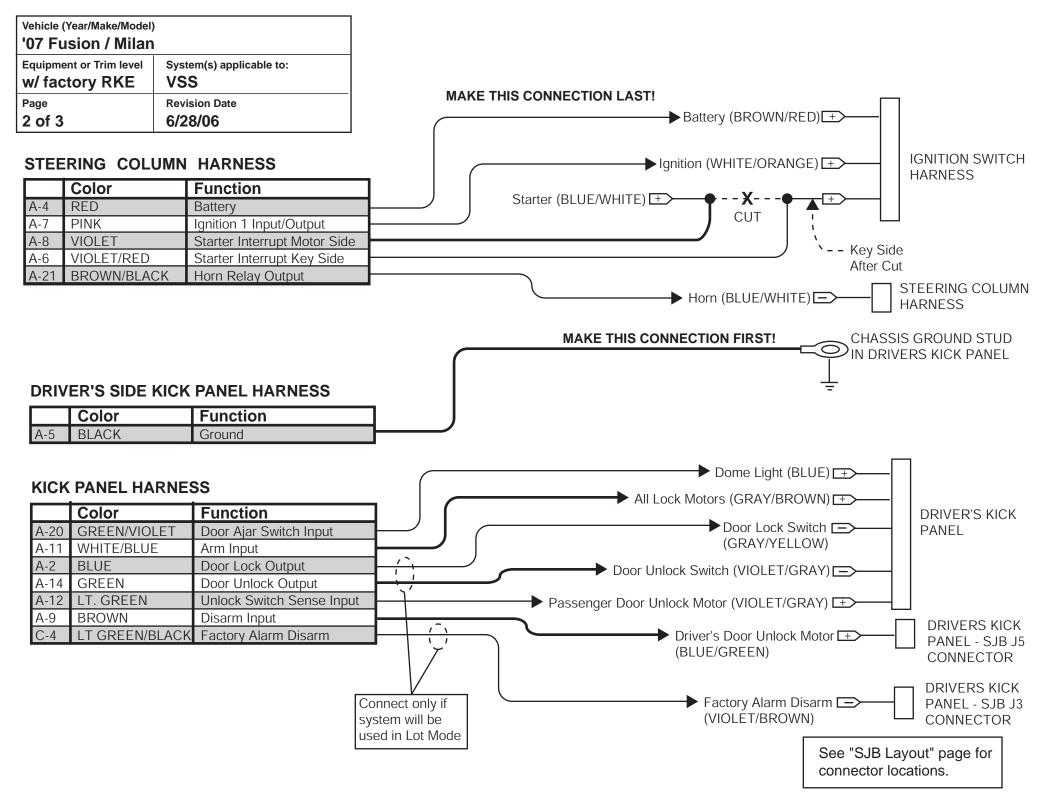


Vehicle (Year/Make/Model) '07 Fusion / Milan		
Equipment or Trim level System(s) applicable to:  ALL ALL		
Page 1 of 1	Revision Date 6/28/06	

(SJB)

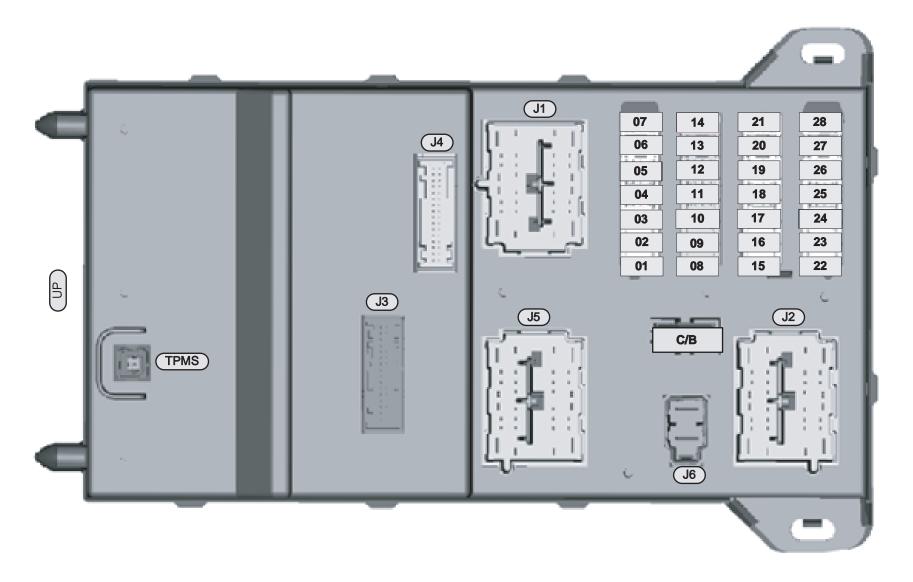

Vehicle (Year/Make/Model)	
Equipment or Trim level	System(s) applicable to:
Page 1 of 4	Revision Date 8/18/06

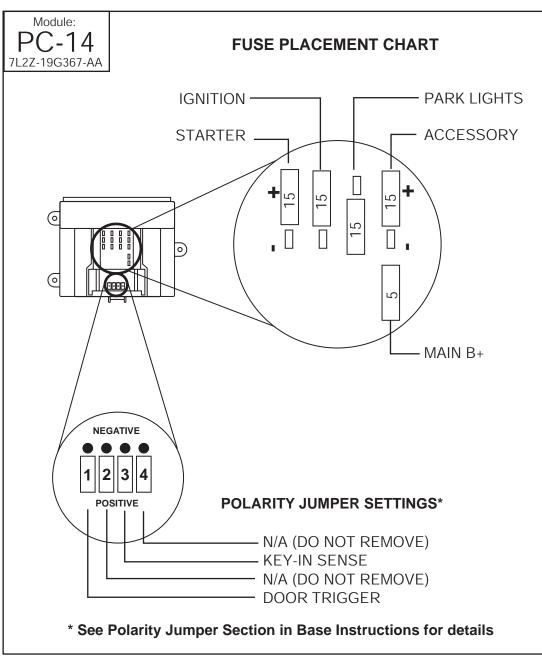

**RMST Kit:** 

7L2Z-19G364-AA


Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - included)

# **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

### **MODULE MOUNTING LOCATION:**

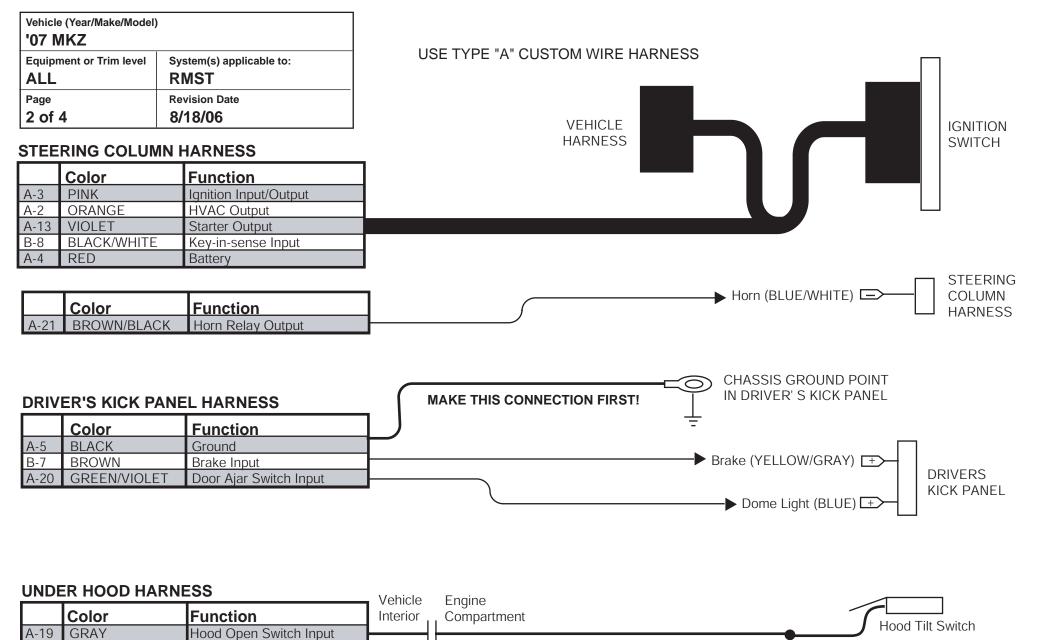

Chassis Ground

Do Not Ground to Hood!

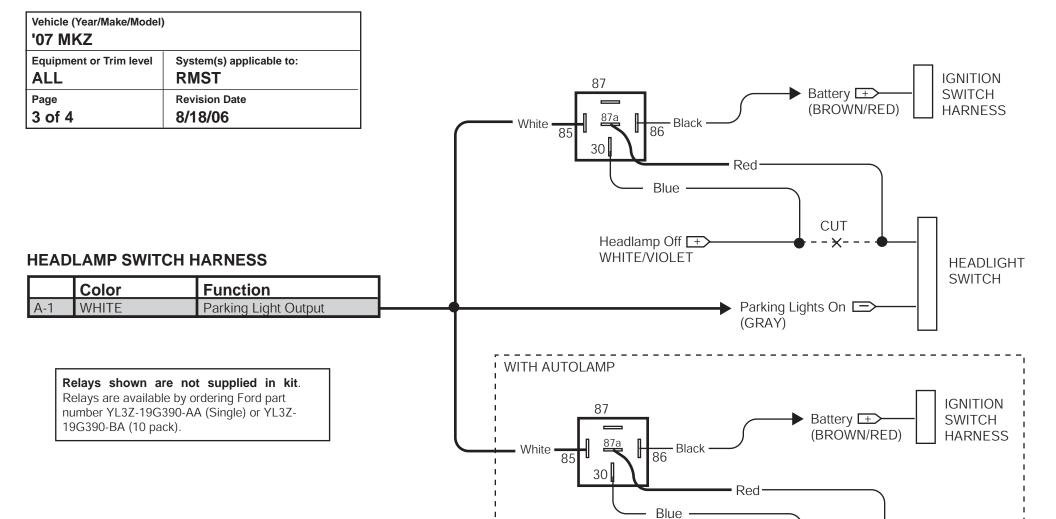

**HEADLIGHT** 

**SWITCH** 


CUT

Autolamp On 🛨


(VIOLET/GREEN)

Vehicle (Year/Make/Model) '07 MKZ		
Equipment or Trim level	System(s) applicable to:	
Page 4 of 4	Revision Date 8/18/06	

(SJB)

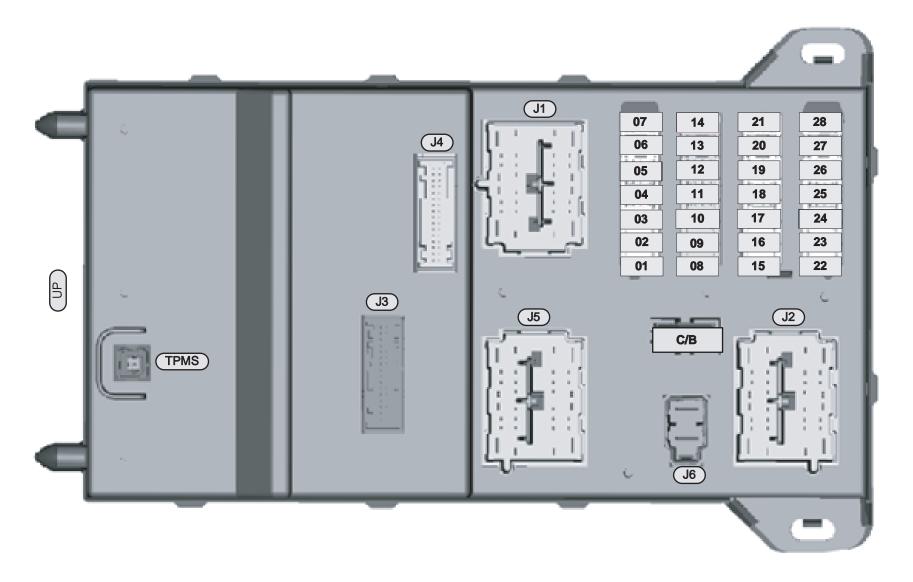

Vehicle (Year/Make/Model) '07 Mustang	)
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 1 of 4	Revision Date 8/18/06

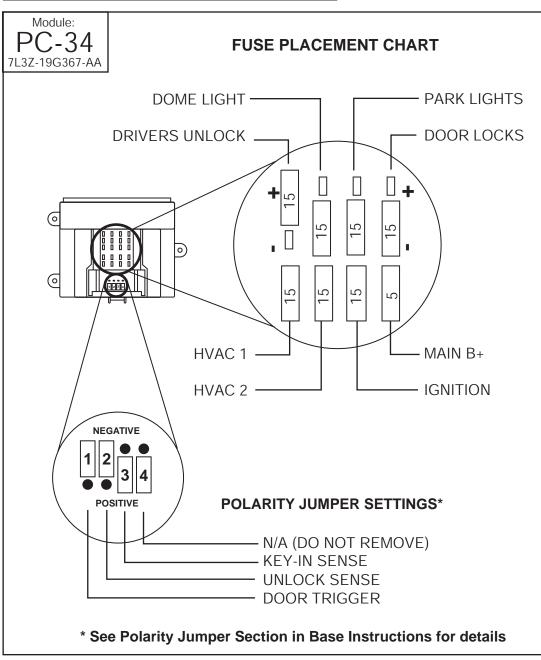

# **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)

### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.


Note 2: See the Optional Connections / Features page


# **MODULE MOUNTING LOCATION:**

Vehicle (Year/Make/Model) '07 Mustang		
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST	
Page	Revision Date	
2 of 4	8/18/06	

	Color	Function
A-5	BLACK	Ground

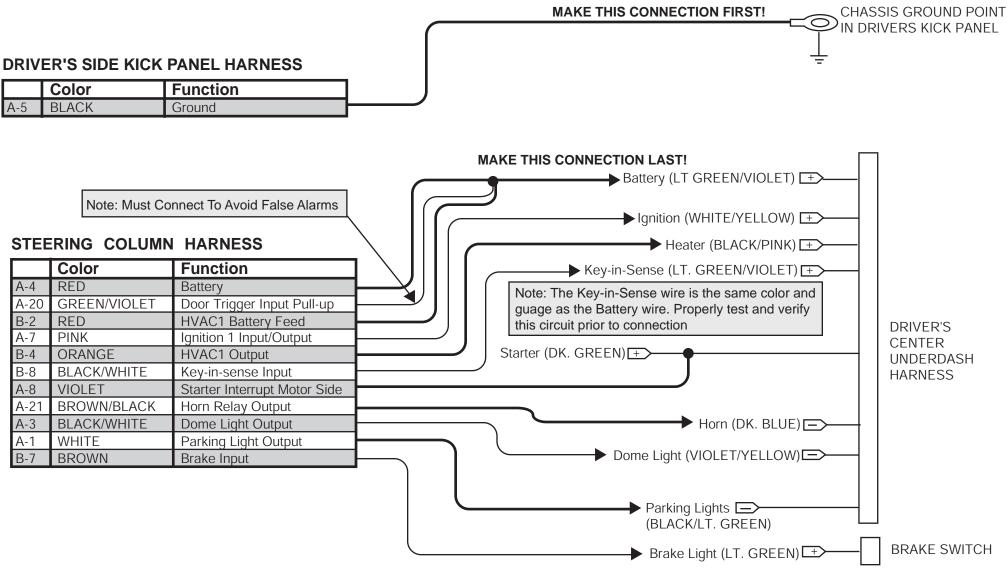

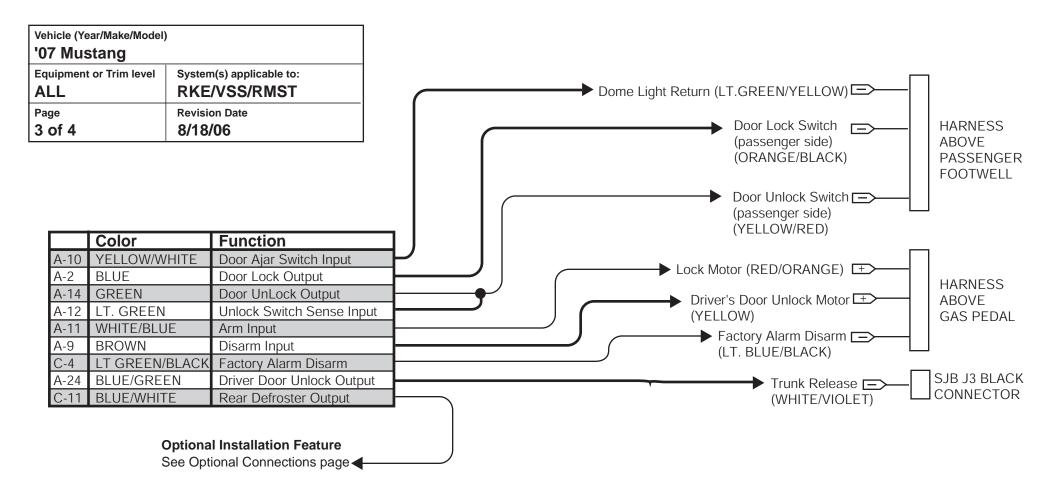

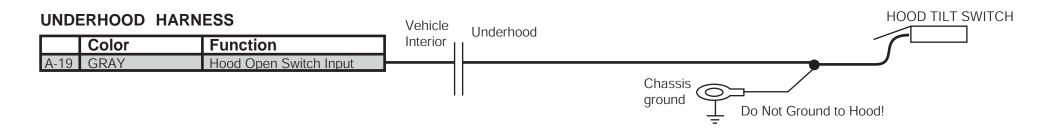


Vehicle (Year/Make/Model) '07 Mustang	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 4 of 4	Revision Date 8/18/06

# **OPTIONAL CONNECTIONS / FEATURES**

#### **OPTION PROGRAMMING REQUIREMENTS**

## **DRIVER'S DOOR PRIORITY UNLOCK**


BANK	OPTION	DESCRIPTION	LED
2	8	DRIVER UNLOCK RELAY	ON
3	1	DRIVER PRIORITY UNLOCK	ON

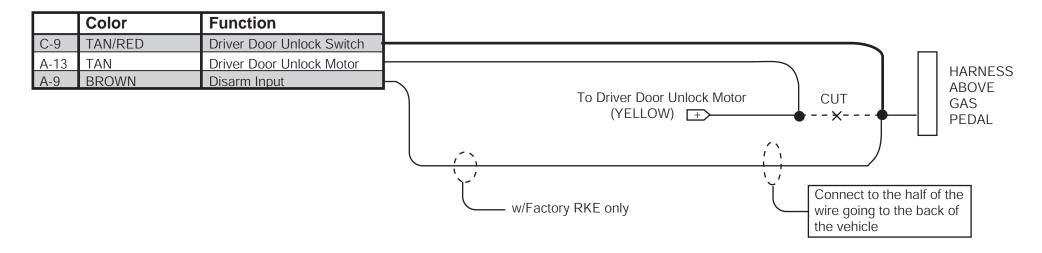

# **REAR DEFROSTER**

	Color	Function
C-11	BLUE/WHITE	Rear Defroster Output

Vehicle (Year/Make/Model) '07 Mustang	
Equipment or Trim level System(s) applicable to:	
ALL	RMST
Page	Revision Date
1 of 2	8/18/06

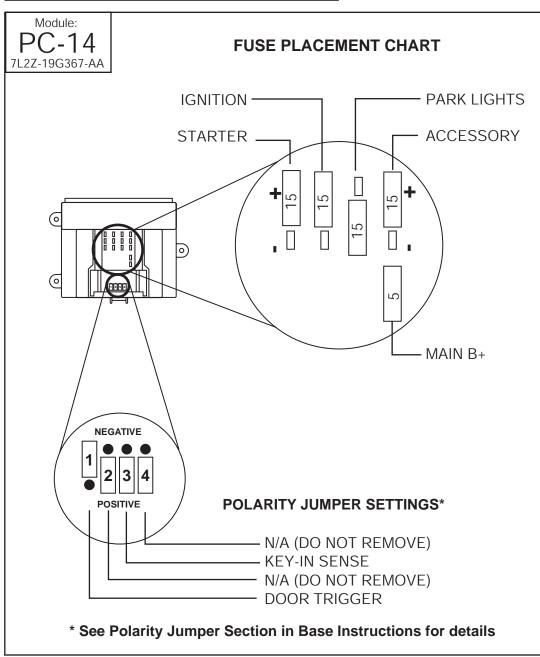

RMST Kit:

7L2Z-19G364-AA


Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - included)

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON


# **MODULE MOUNTING LOCATION:**



#### **STEERING COLUMN HARNESS**


	Color	Function
A-3	PINK	Ignition Input/Output
A-2	ORANGE	HVAC Output
A-13	VIOLET	Starter Output
B-8	BLACK/WHITE	Key-in-sense Input
A-4	RED	Battery

	Color	Function
A-21	BROWN/BLACK	Horn Relay Output
A-1	WHITE	Parking Light Output

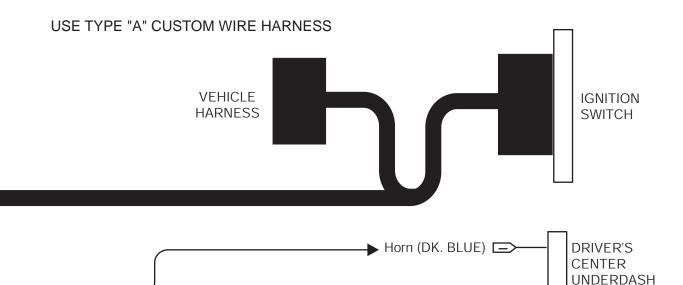

▶ Parking Lights (BLACK/LT. GREEN)

**HARNESS** 

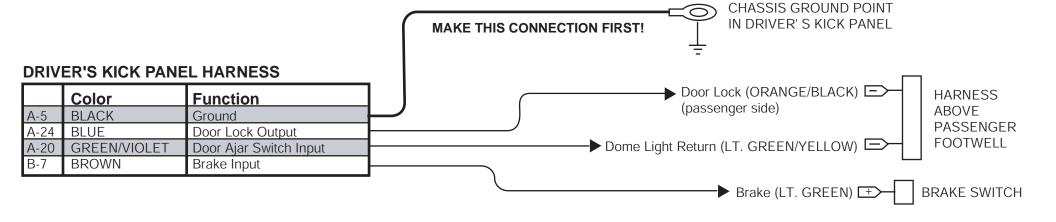


# **UNDER HOOD HARNESS**

Color A-19 GRAY	Function Hood Open Switch Input	Interior	Compartment		Hood Tilt Switch
A-19 GRAT	Hood Open Switch input			Chassis Ground Do Not Ground to Hood!	

Гисти

Vahida

Vehicle (Year/Make/Model) '07 Mustang	)
Equipment or Trim level	System(s) applicable to: VSS
Page 1 of 2	Revision Date 8/18/06

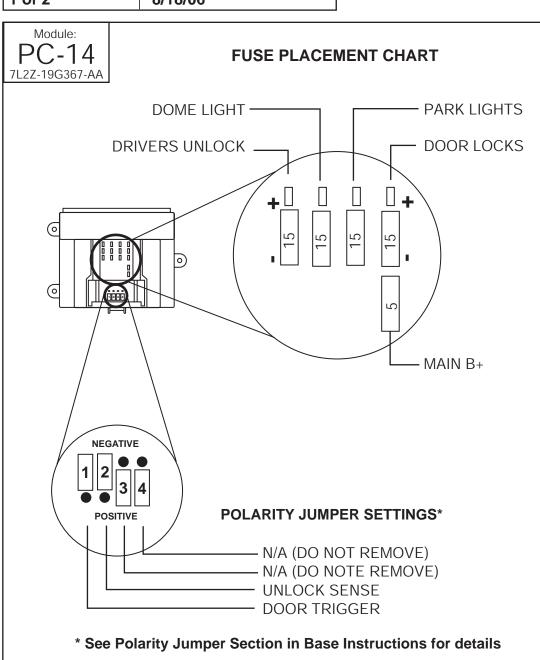

#### VSS Kit:

7L3Z-19A361-AA

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF


Note 1: Perform proper learn procedure per the "Tach Learning" section of the Base instruction sheets.

#### **MODULE MOUNTING LOCATION:**

Left Side of Driver's Underdash


#### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

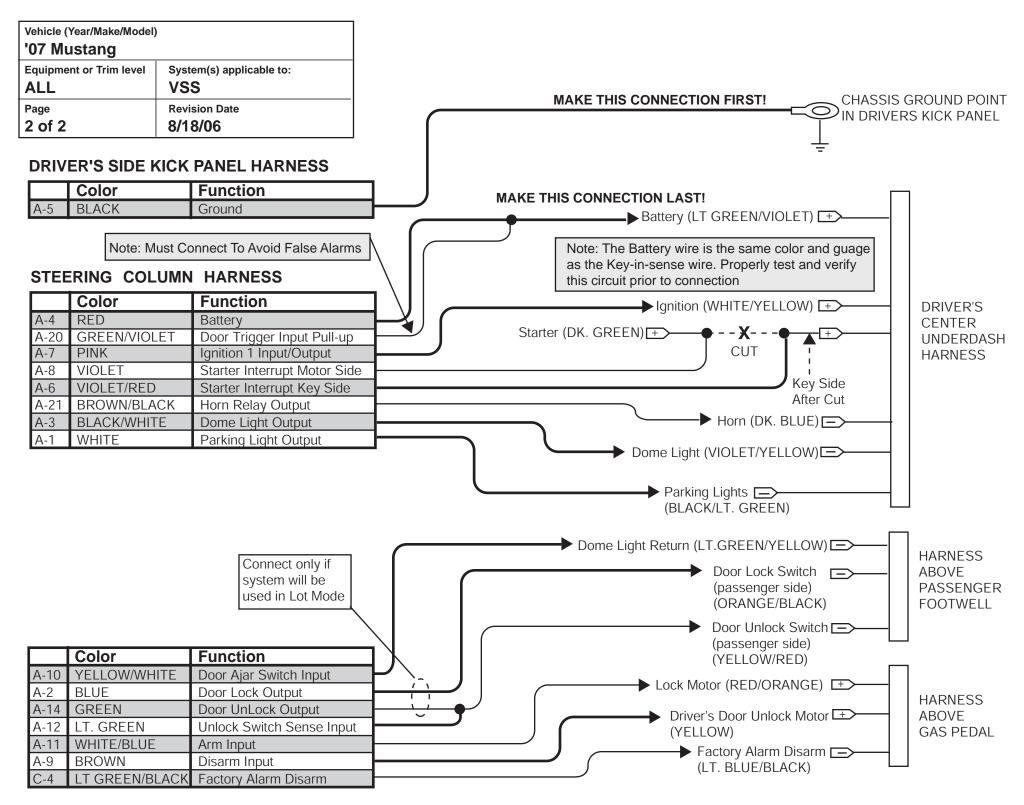


Vehicle (Year/Make/Model) '07 Mustang	
Equipment or Trim level	System(s) applicable to:
Page 1 of 2	Revision Date 8/18/06

**S197 SJB Layout (Front View)** 

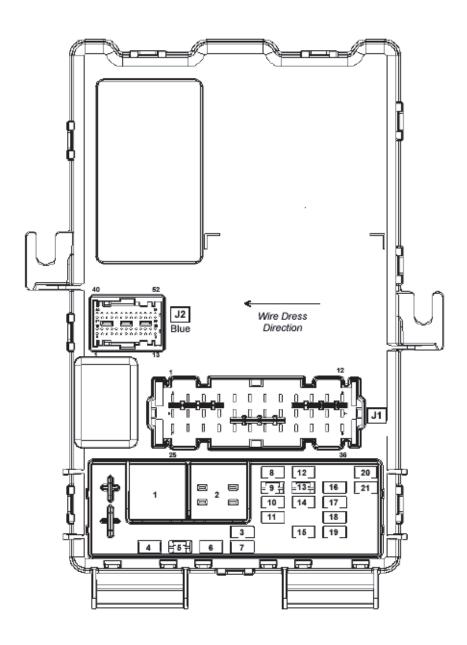


Vehicle (Year/Make/Model) '07 Mustang	
Equipment or Trim level	System(s) applicable to:
Page	Revision Date
2 of 2	5/3/06

S197 SJB Layout (Back View)

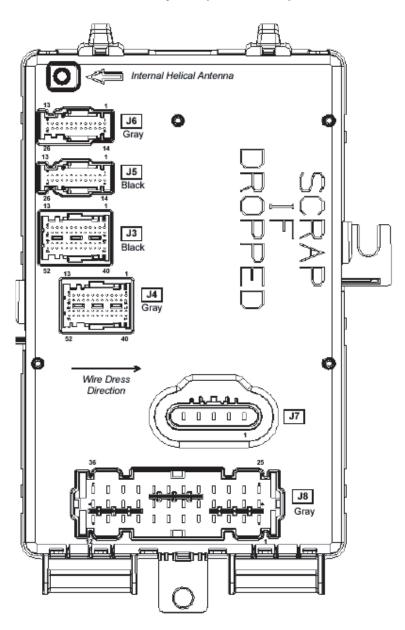

Vehicle (Year/Make/Model) '07 Towncar	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 1 of 5	Revision Date 8/18/06

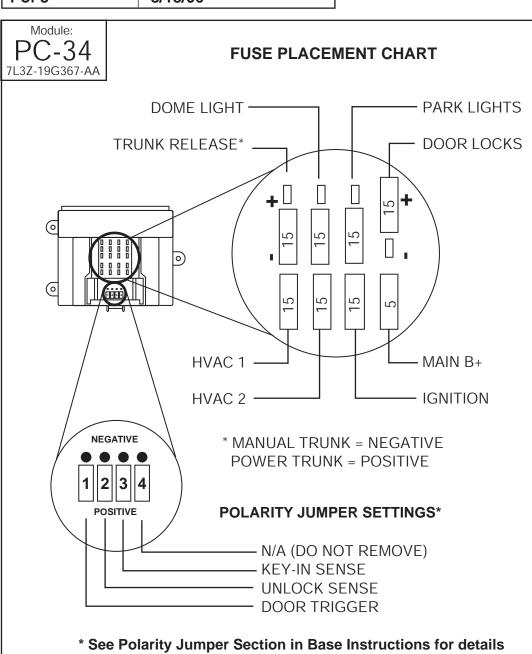

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)

# **RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):**

- 1- Power Window, Slider, Moonroof Interrupt Circuit
- 1- Driver Door Unlock or Trunk Release (optional)
- 2- Memory Seats (optional)


#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

Note 2: See the Optional Connections / Features page

# **MODULE MOUNTING LOCATION:**

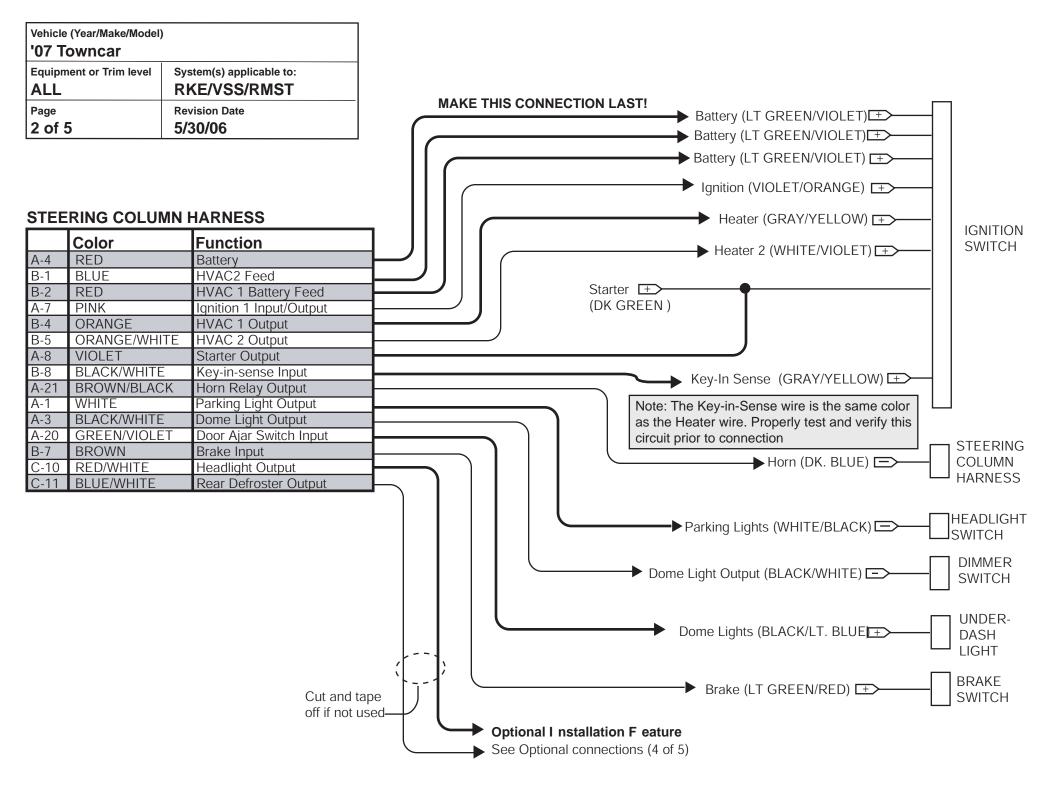


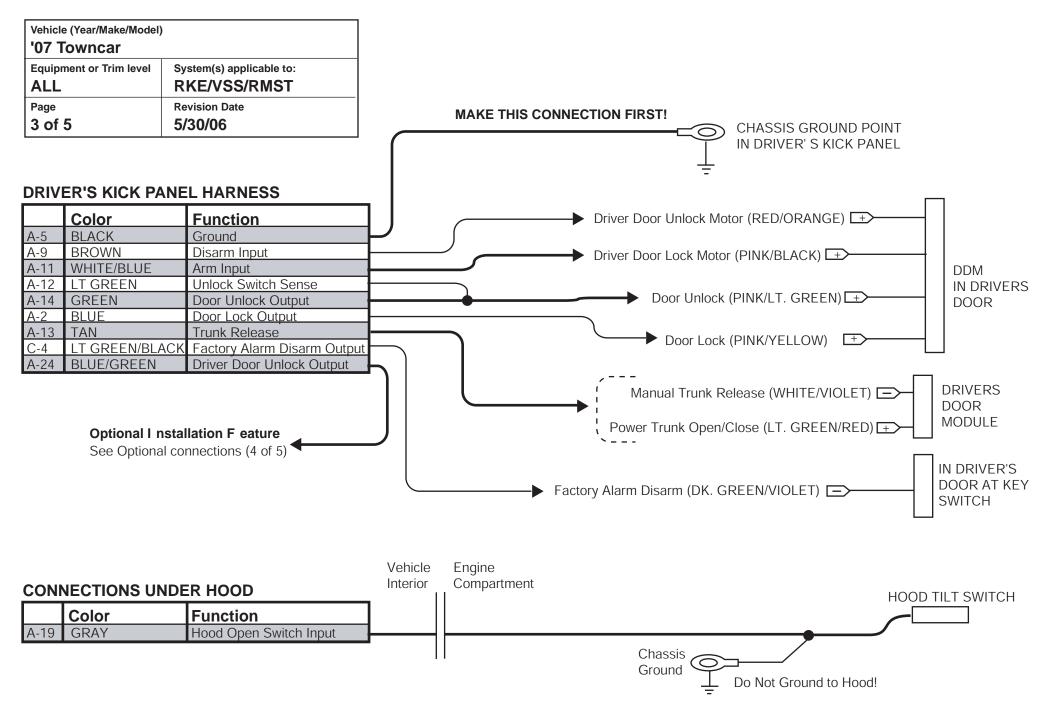

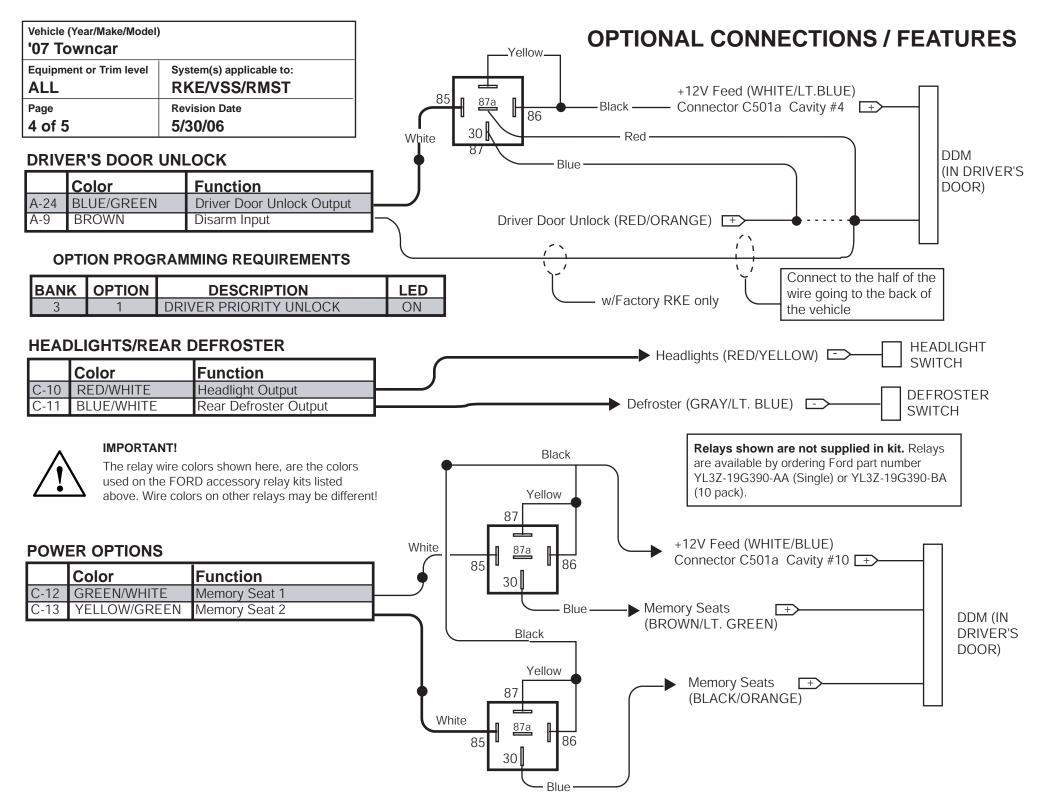

Vehicle (Year/Make/Model) '07 Towncar	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 5 of 5	Revision Date 5/30/06

NOTE: CUTTING THIS WIRE WILL DISABLE ALL POWER WINDOWS AND MOONROOF

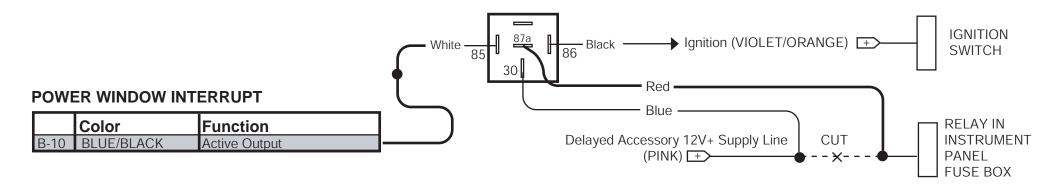




# CAUTION: REMOVE YELLOW WIRE AND TERMINAL FROM RELAY SOCKET

**Relays shown are not supplied in kit.** Relays are available by ordering Ford part number YL3Z-19G390-AA (Single) or YL3Z-19G390-BA (10 pack).

Vehicle (Year/Make/Model) '07 Towncar	)
Equipment or Trim level	System(s) applicable to:
Page 1 of 3	Revision Date 8/18/06

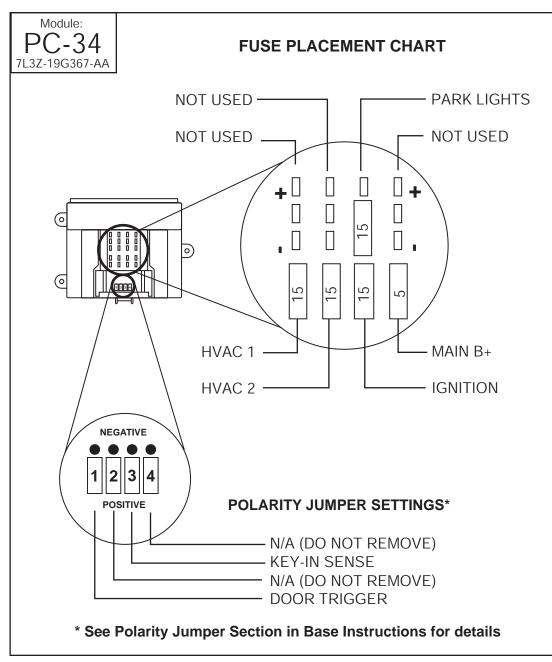

#### RMST Kit:

7W3Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA)


# **RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):**

1- Power Window, Slider, Moonroof Interrupt Circuit

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

#### **MODULE MOUNTING LOCATION:**

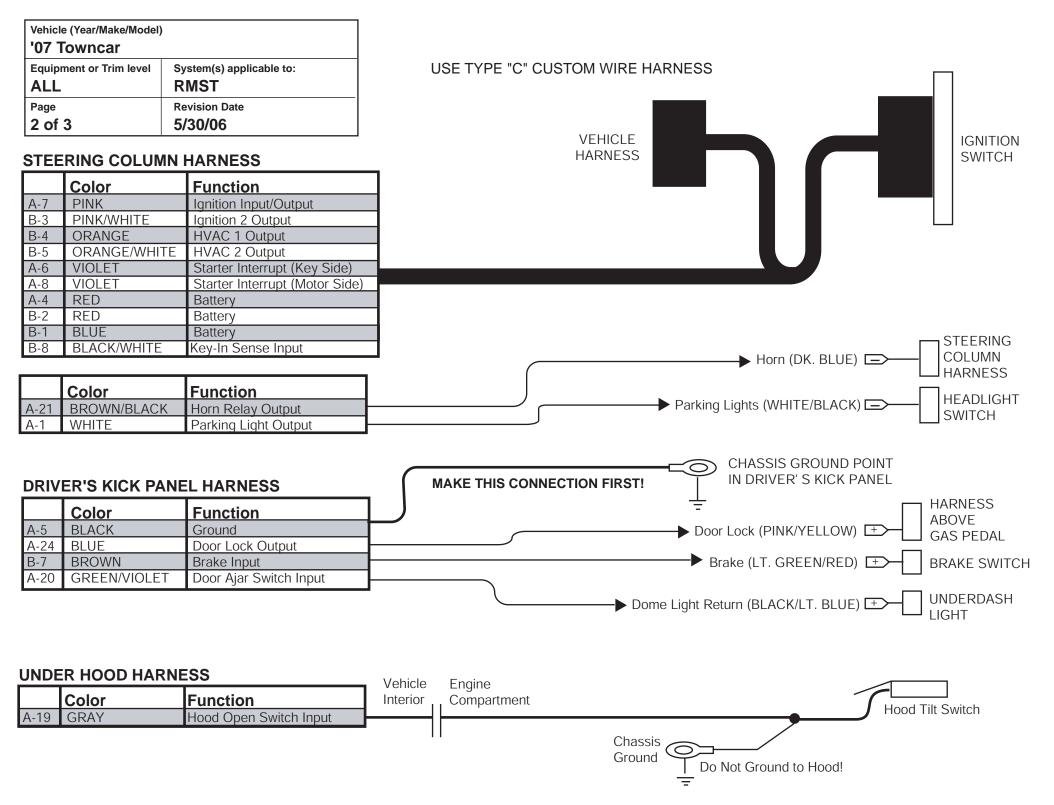

Vehicle (Year/Make/Model) '07 Towncar	
Equipment or Trim level	System(s) applicable to:
Page 3 of 3	Revision Date 5/30/06

NOTE: CUTTING THIS WIRE WILL DISABLE ALL POWER WINDOWS AND MOONROOF

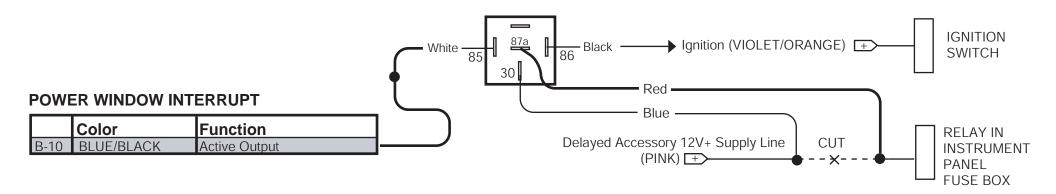




# CAUTION: REMOVE YELLOW WIRE AND TERMINAL FROM RELAY SOCKET

**Relays shown are not supplied in kit.** Relays are available by ordering Ford part number YL3Z-19G390-AA (Single) or YL3Z-19G390-BA (10 pack).

Vehicle (Year/Make/Model) '07 Towncar	)
Equipment or Trim level	System(s) applicable to: VSS
Page	Revision Date
1 of 2	5/30/06

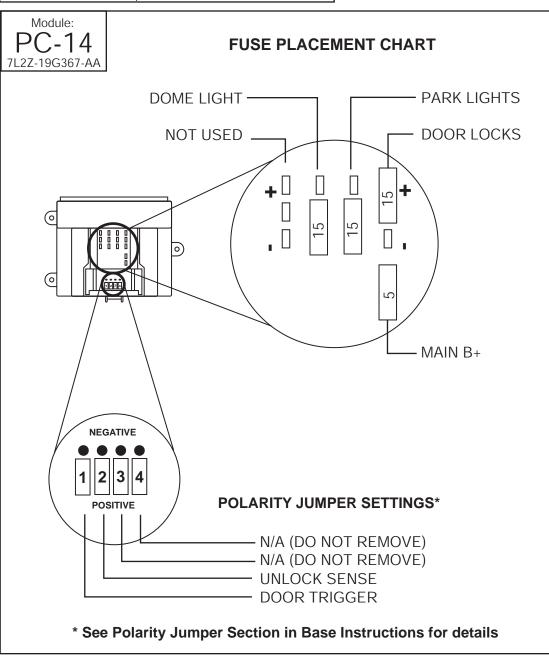

**VSS Kit:** 

7L3Z-19A361-AA

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

## **MODULE MOUNTING LOCATION:**


Left Side of Driver's Underdash

#### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

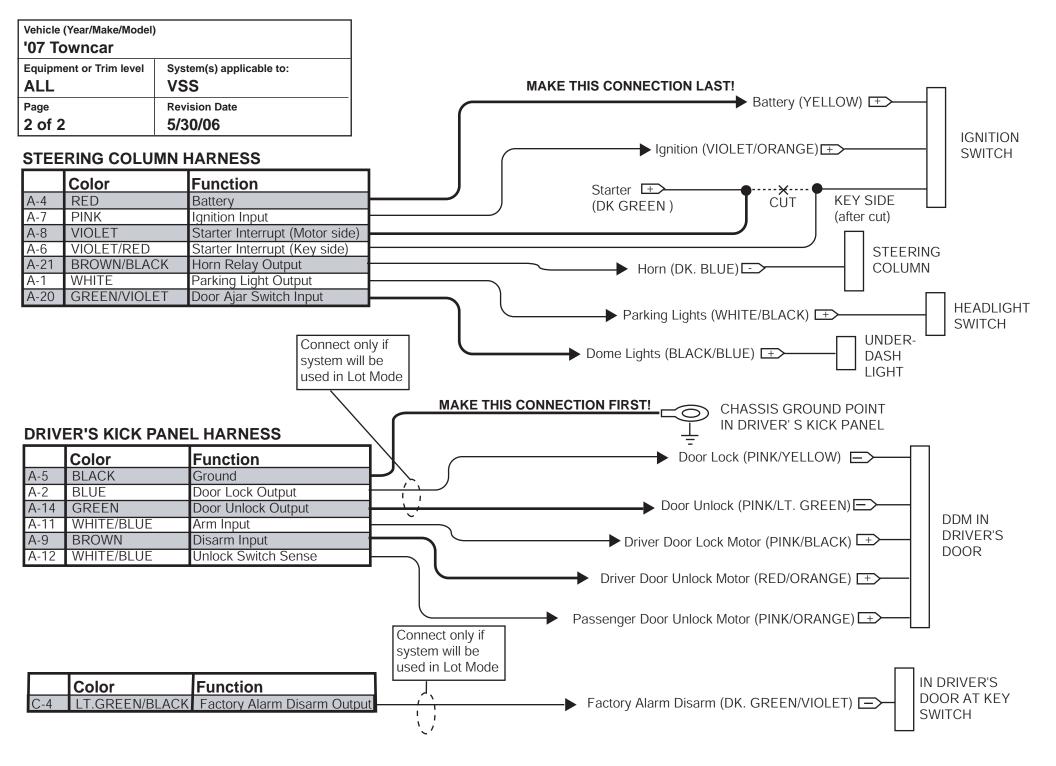

Vehicle (Year/Make/Model) '07 Crown Vic/Grand Marquis		
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST	
Page 1 of 6	Revision Date 8/1806	

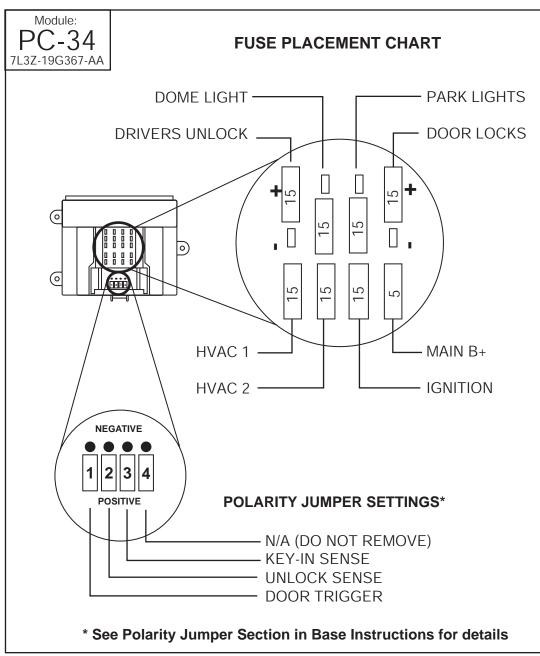

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)

# RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):

- 2- Power Window, Moonroof Interrupt Circuit
- 1- Trunk Release or Drivers Door Unlock (optional)


#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.


Note 2: See the Optional Connections / Features page

# **MODULE MOUNTING LOCATION:**

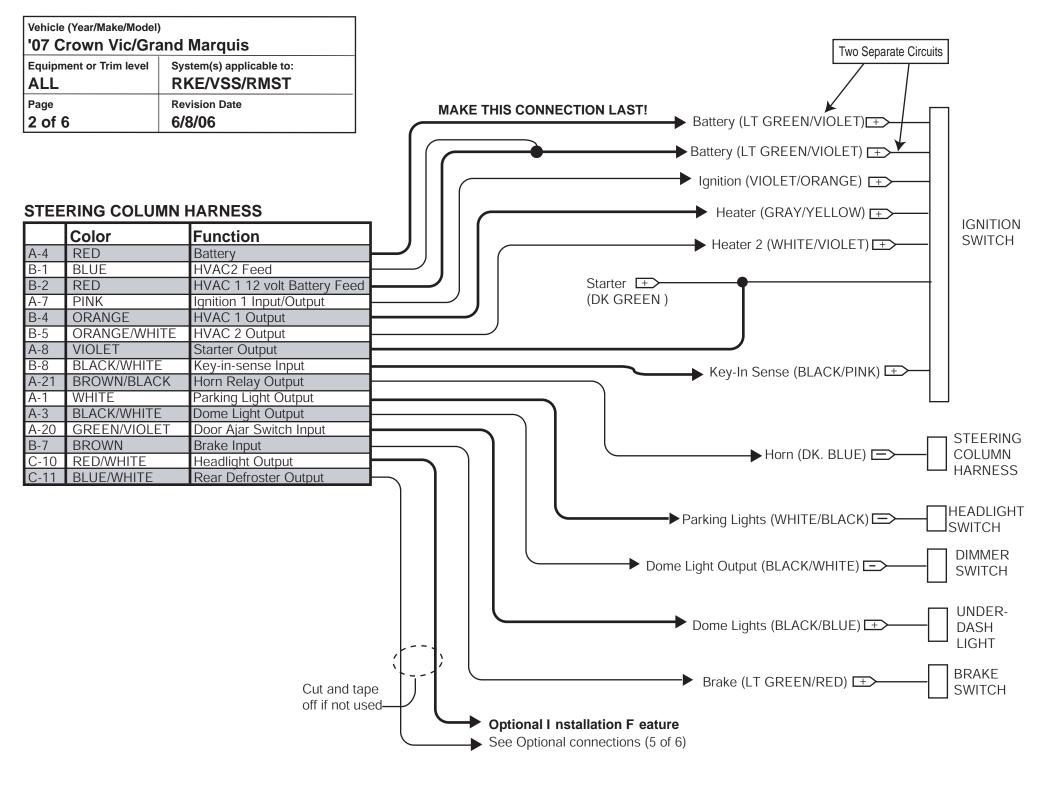

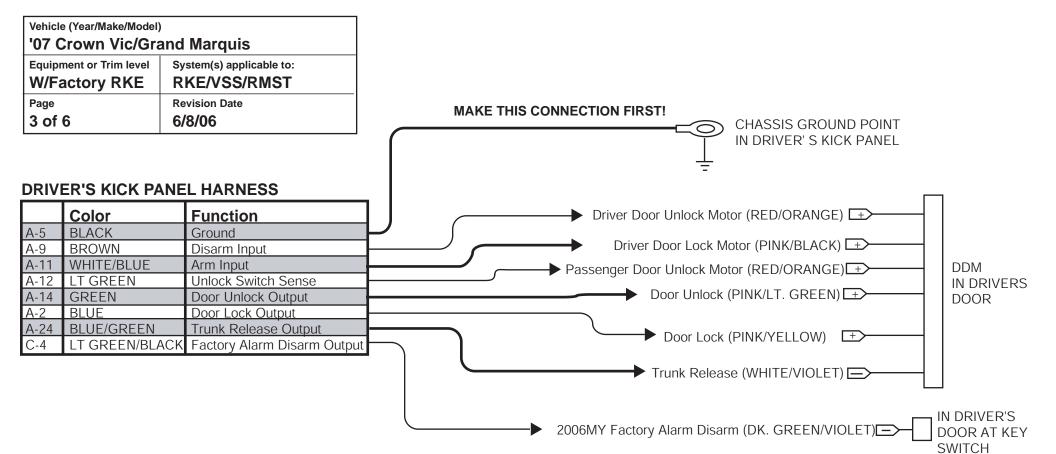

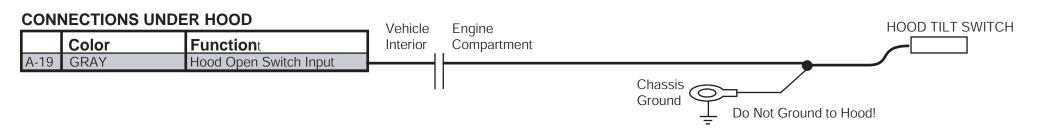

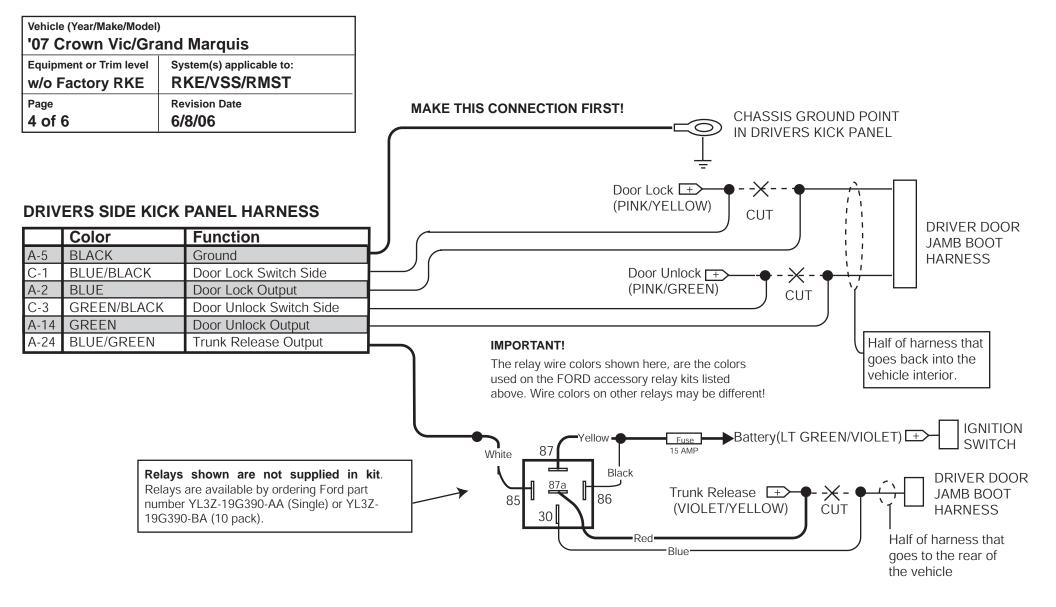

# Color Functiont Interior Compartment A-19 GRAY Hood Open Switch Input Chassis Ground Do Not Ground to Hood! Color Functiont Interior Compartment Chassis Ground Tilt SWITCH Compartment


Vehicle (Year/Make/Model) '07 Crown Vic/Gra	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 5 of 6	Revision Date 6/8/06

# **OPTIONAL CONNECTIONS / FEATURES**

#### **OPTION PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
2	8	DRIVER UNLOCK RELAY	ON
3	1	DRIVER PRIORITY UNLOCK	ON

#### **DRIVER'S DOOR PRIORITY UNLOCK**

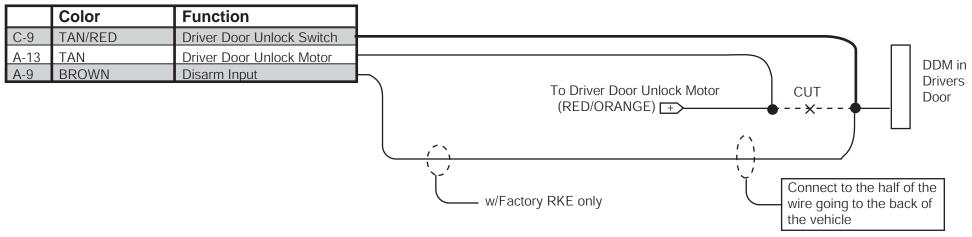


#### **HEADLIGHTS/REAR DEFROSTER**

	Color	Function
:-10	RED/WHITE	Headlight Output
C-11	BLUE/WHITE	Rear Defroster Output

Vehicle (Year/Make/Model) '07 Crown Vic/Grand Marquis			
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST		
Page 6 of 6	Revision Date 6/8/06		


NOTE: CUTTING THIS WIRE WILL DISABLE ALL POWER WINDOWS AND MOONROOF

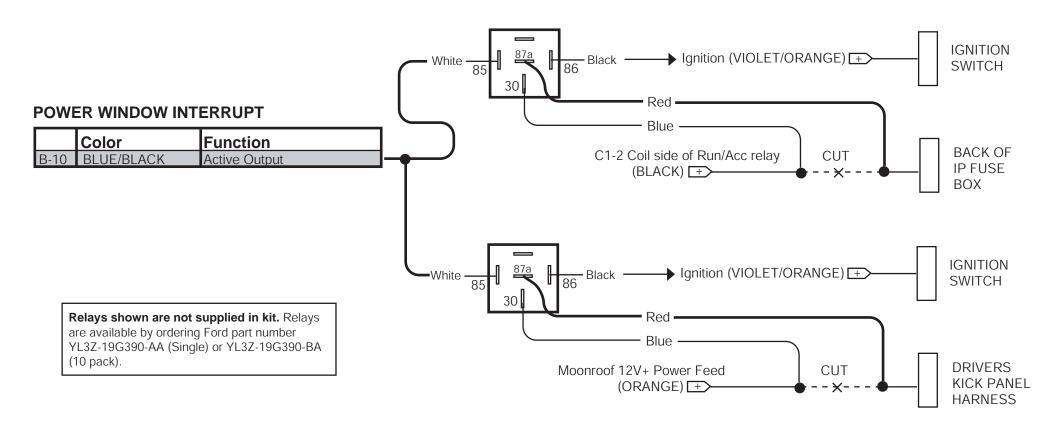



CAUTION: REMOVE YELLOW WIRE AND TERMINAL FROM RELAY SOCKET

Vehicle (Year/Make/Model) '07 Crown Vic/Grand Marquis				
Equipment or Trim level System(s) applicable to:  ALL RMST				
Page 1 of 3	Revision Date 8/18/06			

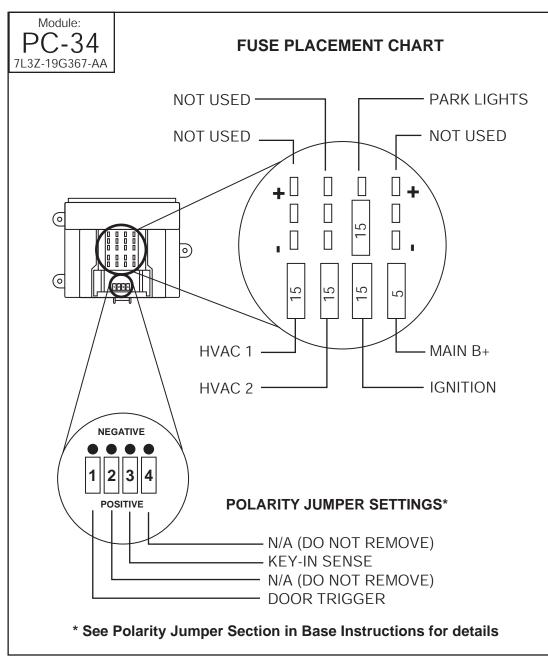

#### **RMST Kit:**

7W3Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA)


# RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):

- 2- Power Window, Moonroof Interrupt Circuit
- 1- Trunk Release or Drivers Door Unlock (optional)

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK OPTION		DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

# **MODULE MOUNTING LOCATION:**



# **STEERING COLUMN HARNESS**

	Color	Function
A-7	PINK	Ignition Input/Output
B-3	PINK/WHITE	Ignition 2 Output
B-4	ORANGE	HVAC 1 Output
B-5	ORANGE/WHITE	HVAC 2 Output
A-6	VIOLET	Starter Interrupt (Key Side)
A-8	VIOLET	Starter Interrupt (Motor Side)
A-4	RED	Battery
B-2	RED	Battery
B-1	BLUE	Battery
B-8	BLACK/WHITE	Key-In Sense Input

Color		Function
A-21	BROWN/BLACK	Horn Relay Output
A-1	WHITE	Parking Light Output

**DRIVER'S KICK PANEL HARNESS** 


**Function** 

Brake Input

Door Lock Output

Door Ajar Switch Input

Ground

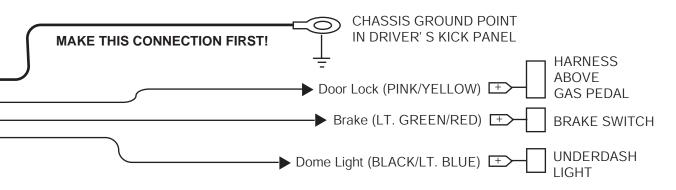

► Horn (DK. BLUE) 🖃

→ Parking Lights (WHITE/BLACK)

# LINDER HOOD HARNESS

GREEN/VIOLET

Color

BLACK

BROWN

BLUE

A-5

A-24

A-20

B-7

ONDER HOOD HARRIESS		Vehicle	Engine			
	Color	Function	Interior	Compartment		Hood Tilt Switch
A-19	GRAY	Hood Open Switch Input	$\vdash$		•	HOOG THE SWILCH
			'	1	Chassis	
					Ground Do Not Ground to Hoo	d!

USE TYPE "C" CUSTOM WIRE HARNESS

**VEHICLE** 

**HARNESS** 

**IGNITION** 

**SWITCH** 

**STEERING** COLUMN


HARNESS

**SWITCH** 

HEADLIGHT

Vehicle (Year/Make/Model) '07 Crown Vic/Grand Marquis			
Equipment or Trim level	System(s) applicable to:		
Page	Revision Date		
3 of 3	6/8/06		


NOTE: CUTTING THIS WIRE WILL DISABLE ALL POWER WINDOWS AND MOONROOF

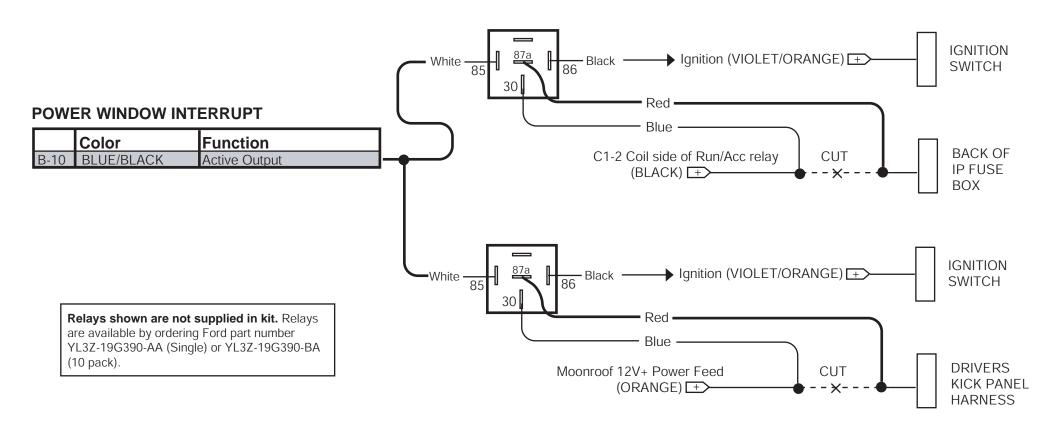



CAUTION: REMOVE YELLOW WIRE AND TERMINAL FROM RELAY SOCKET

Vehicle (Year/Make/Model) '07 Crown Vic/Grand Marquis				
Equipment or Trim level	System(s) applicable to:			
Page 1 of 2	Revision Date 6/8/06			

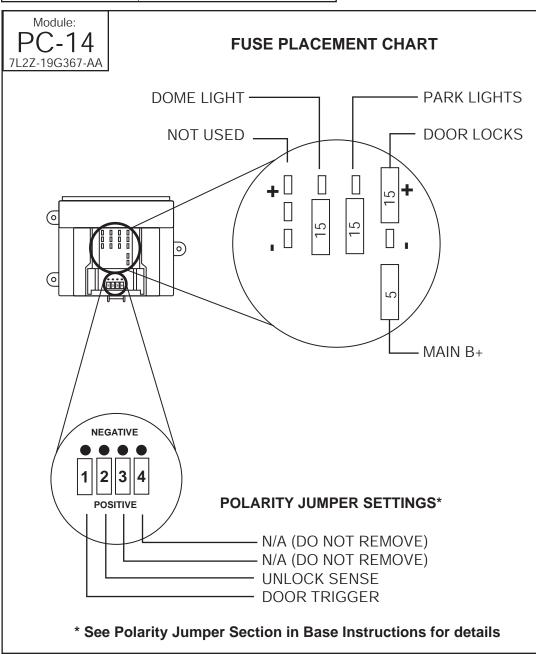

#### VSS Kit:

7L3Z-19A361-AA

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

#### MODULE MOUNTING LOCATION:


Left Side of Driver's Underdash

#### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

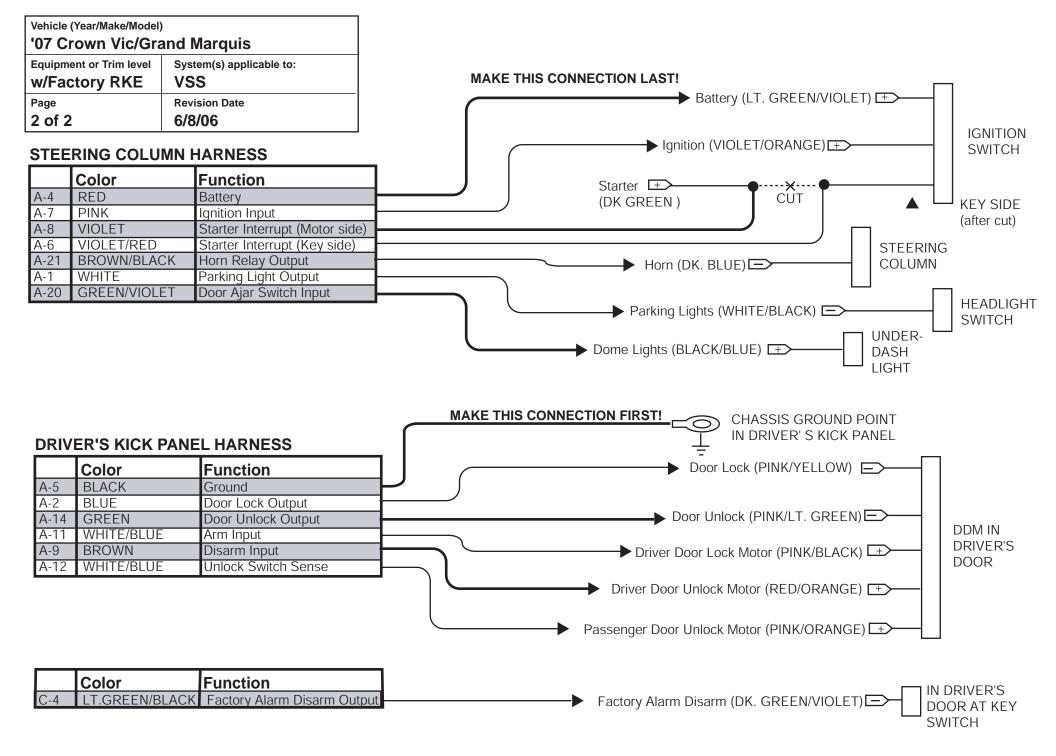

Vehicle (Year/Make/Model) '08 Crown Vic/Grand Marquis			
Equipment or Trim level System(s) applicable to:  ALL RKE/VSS/RMST			
Page 1 of 6	Revision Date 4/13/07		

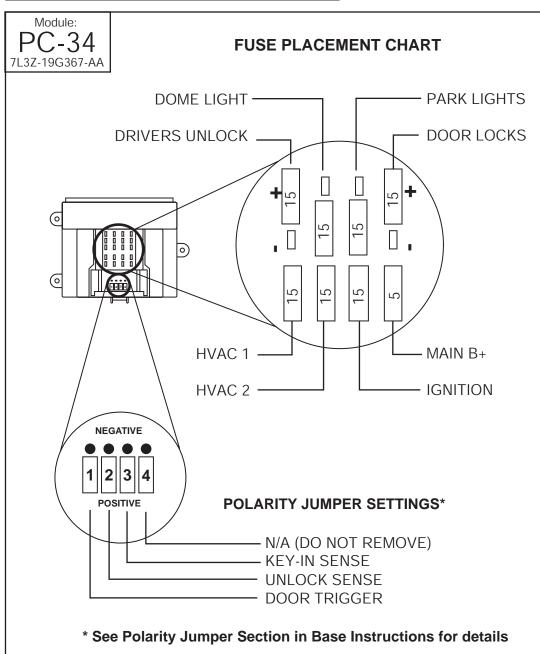

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)

# RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):

- 2- Power Window, Moonroof Interrupt Circuit
- 1- Trunk Release or Drivers Door Unlock (optional)


#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON

Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

Note 2: See the Optional Connections / Features page

# **MODULE MOUNTING LOCATION:**

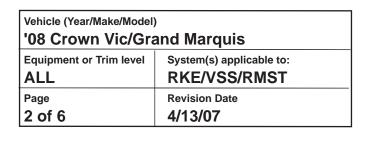


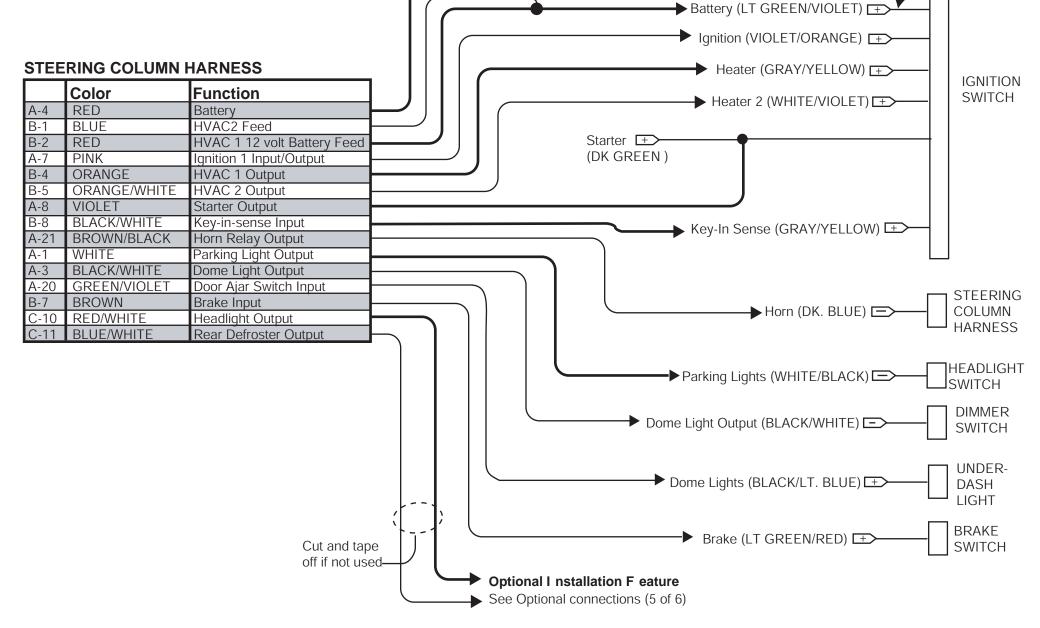


MAKE THIS CONNECTION LAST!

Two Separate Circuits

Battery (LT GREEN/VIOLET) =

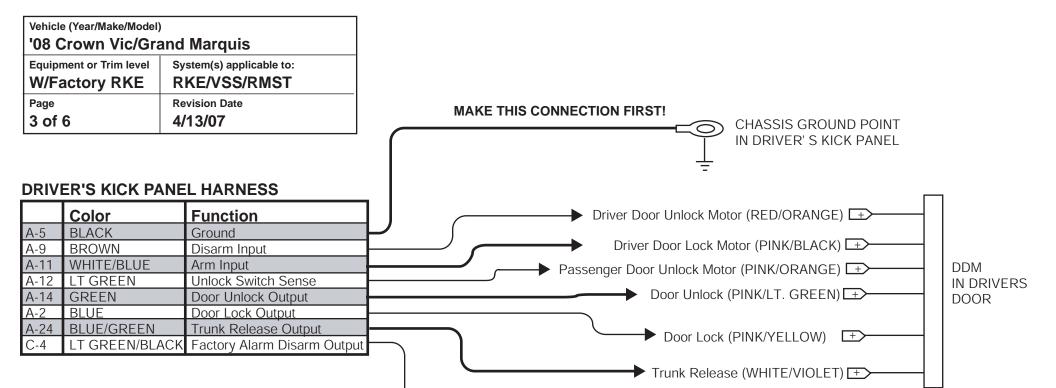


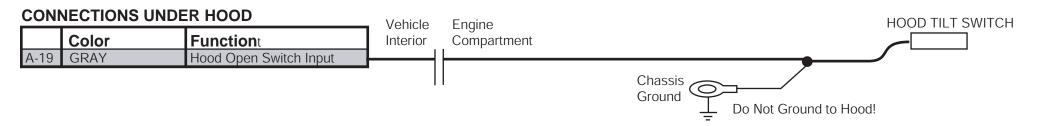

2006MY Factory Alarm Disarm (DK. GREEN/VIOLET)

IN DRIVER'S

DOOR AT KEY SWITCH

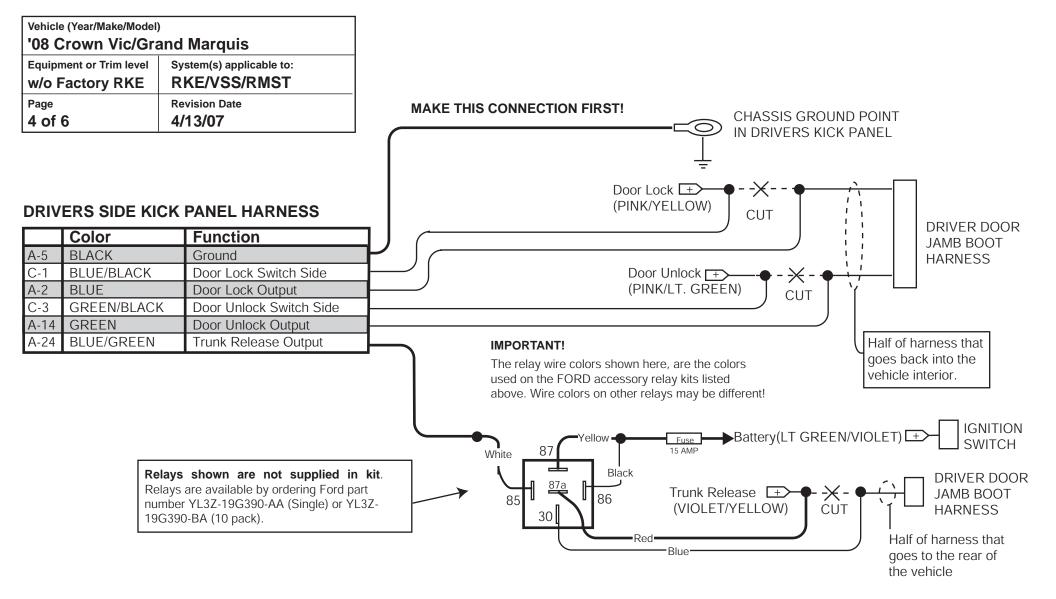

#### **CONNECTIONS UNDER HOOD**

	Color	Functiont	Vehicle Interior	Engine Compartment	HOOD TILT SWITCH
A-19	GRAY	Hood Open Switch Input			Chassis Ground Do Not Ground to Hood!

LICOD TILT CWITCH


Vehicle (Year/Make/Model) '08 Crown Vic/Gra	ehicle (Year/Make/Model) 08 Crown Vic/Grand Marquis		
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST		
Page 5 of 6	Revision Date 4/13/07		

# **OPTIONAL CONNECTIONS / FEATURES**

#### **OPTION PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
2	8	DRIVER UNLOCK RELAY	ON
3	1	DRIVER PRIORITY UNLOCK	ON

#### **DRIVER'S DOOR PRIORITY UNLOCK**

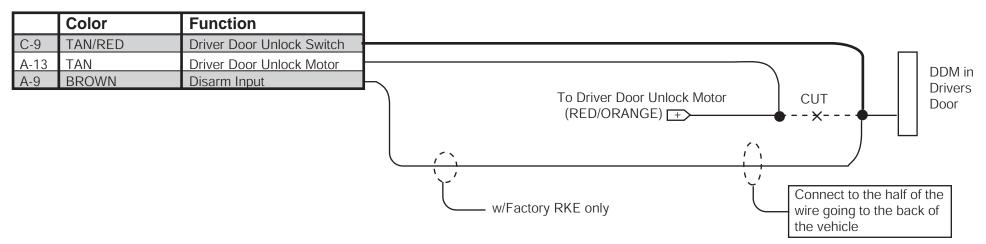


#### **HEADLIGHTS/REAR DEFROSTER**

	Color	Function
10	RED/WHITE	Headlight Output
-11	BLUE/WHITE	Rear Defroster Output


Vehicle (Year/Make/Model	hicle (Year/Make/Model) 8 Crown Vic/Grand Marquis		
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST		
Page 6 of 6	Revision Date 4/13/07		

NOTE: CUTTING THIS WIRE WILL DISABLE ALL POWER WINDOWS AND MOONROOF

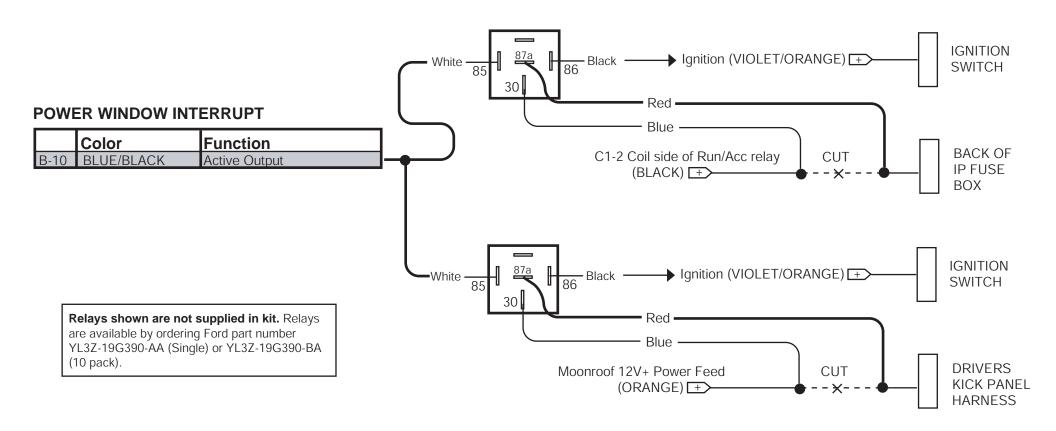

**CAUTION: REMOVE YELLOW WIRE AND TERMINAL FROM RELAY SOCKET** 

hicle (Year/Make/Model) 8 Crown Vic/Grand Marquis		
System(s) applicable to:  RMST		
Revision Date 4/13/07		
r		

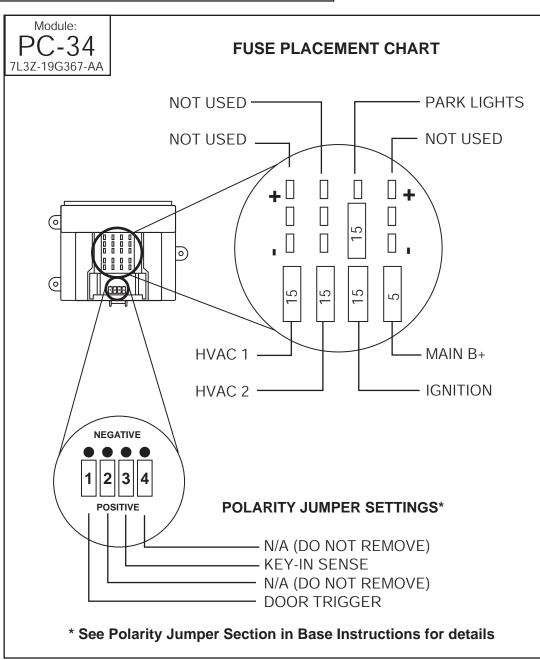

#### **RMST Kit:**

7W3Z-19G364-AA

# Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA)

# RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):

- 2- Power Window, Moonroof Interrupt Circuit
- 1- Trunk Release or Drivers Door Unlock (optional)

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

# **MODULE MOUNTING LOCATION:**

Vehicle (Year/Make/Model) '07 Crown Vic/Grand Marquis	
Equipment or Trim level System(s) applicable to:  ALL RMST	
Page 2 of 3	Revision Date 6/8/06

	Color	Function
A-7	PINK	Ignition Input/Output
B-3	PINK/WHITE	Ignition 2 Output
B-4	ORANGE	HVAC 1 Output
B-5	ORANGE/WHITE	HVAC 2 Output
A-6	VIOLET	Starter Interrupt (Key Side)
A-8	VIOLET	Starter Interrupt (Motor Side)
A-4	RED	Battery
B-2	RED	Battery
B-1	BLUE	Battery
B-8	BLACK/WHITE	Key-In Sense Input


	Color	Function
A-21	BROWN/BLACK	Horn Relay Output
A-1	WHITE	Parking Light Output

#### **DRIVER'S KICK PANEL HARNESS**

Color	Function
BLACK	Ground
BROWN	Brake Input
GREEN/VIOLET	Door Ajar Switch Input
BLUE	Door Lock Output
	BLACK BROWN GREEN/VIOLET

#### **UNDER HOOD HARNESS**


	Color	Function
A-19	GRAY	Hood Open Switch Input

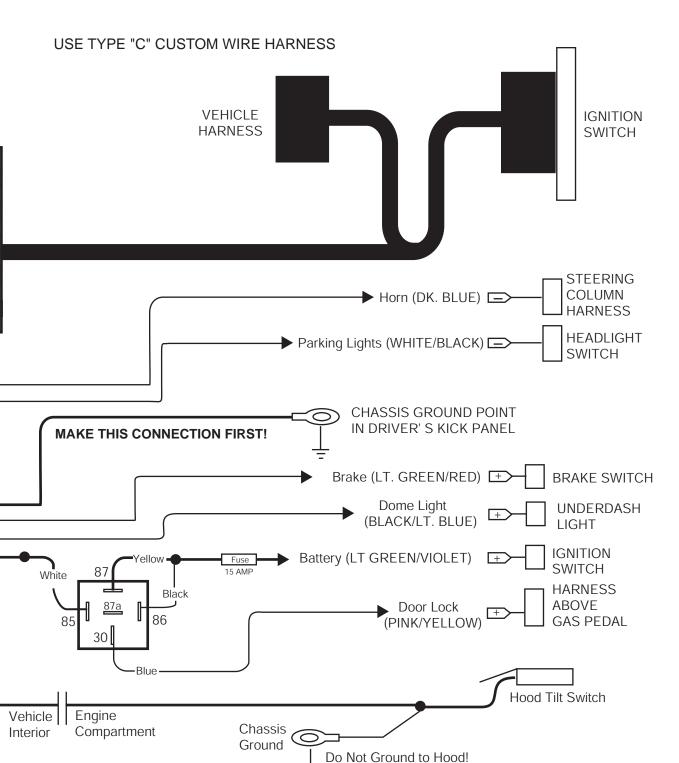

Vehicle (Year/Make/Model) '08 Crown Vic/Grand Marquis	
Equipment or Trim level System(s) applicable to:  ALL RMST	
Page 3 of 3	Revision Date 4/13/07


# POWER WINDOW / MOONROOF INTERRUPTS

NOTE: CUTTING THIS WIRE WILL DISABLE ALL POWER WINDOWS AND MOONROOF

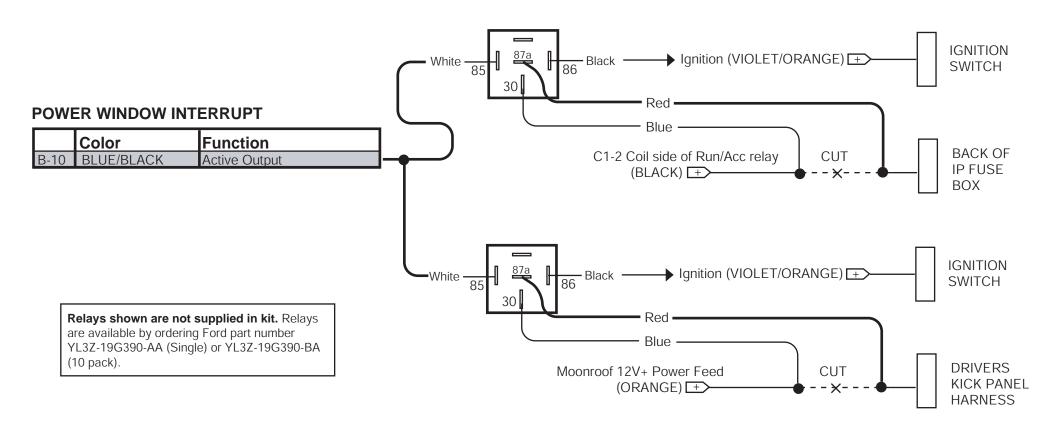

CAUTION: REMOVE YELLOW WIRE AND TERMINAL FROM RELAY SOCKET

Vehicle (Year/Make/Model) '08 Crown Vic/Grand Marquis	
Equipment or Trim level System(s) applicable to: VSS	
Page 1 of 2	Revision Date 4/13/07

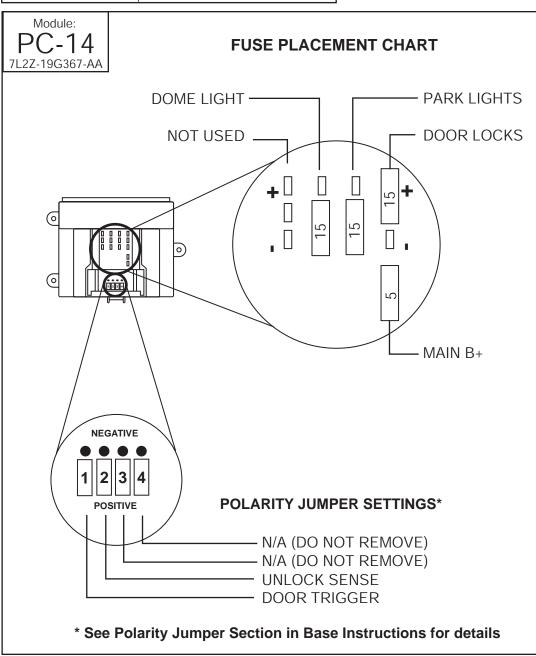

#### VSS Kit:

7L3Z-19A361-AA

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION L	
1	1	LITE TOUCH ADJUSTMENT note	
1	2	FULL SHOCK ADJUSTMENT note	
1	4	DOOR AJAR INVERT ON	
1	5	UNLOCK SENSE INVERT ON	
2	1	STARTER INTERRUPT	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

#### MODULE MOUNTING LOCATION:


Left Side of Driver's Underdash

#### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).




	Color	Function
A-4	RED	Battery
A-7	PINK	Ignition Input
A-8	VIOLET	Starter Interrupt (Motor side)
A-6	VIOLET/RED	Starter Interrupt (Key side)
A-21	BROWN/BLACK	Horn Relay Output
A-1	WHITE	Parking Light Output
A-20	GREEN/VIOLET	Door Ajar Switch Input

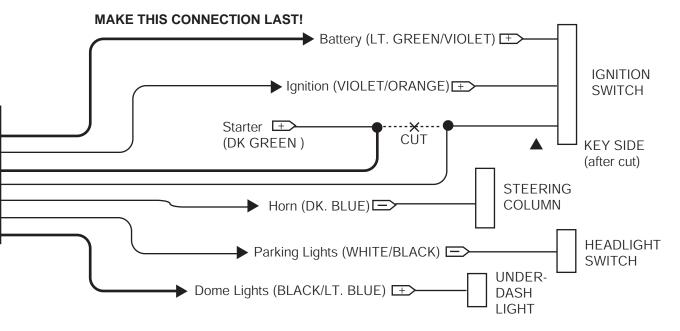


### **DRIVER'S KICK PANEL HARNESS**

	Color	Function
A-5	BLACK	Ground
A-2	BLUE	Door Lock Output
A-14	GREEN	Door Unlock Output
A-11		Arm Input
A-9	BROWN	Disarm Input
A-12	WHITE/BLUE	Unlock Switch Sense

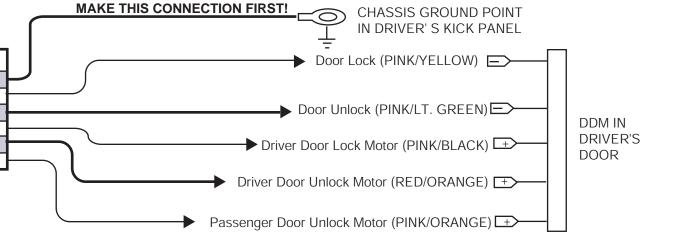

	Color	Function			_	I IN DRIVER'S
C-4	LT.GREEN/BLACK	Factory Alarm Disarm Output	<b></b>	Factory Alarm Disarm (DK. GREEN/VIOLET)	┤ '	DOOR AT KEY
						SWITCH

Vehicle (Year/Make/Model) '08 Mustang	)
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 1 of 4	Revision Date 6/4/07

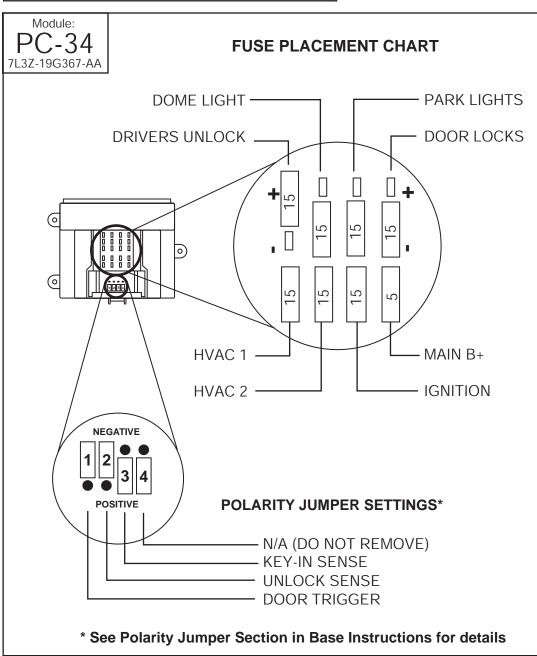

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

#### Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)


#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON

Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

Note 2: See the Optional Connections / Features page

#### **MODULE MOUNTING LOCATION:**

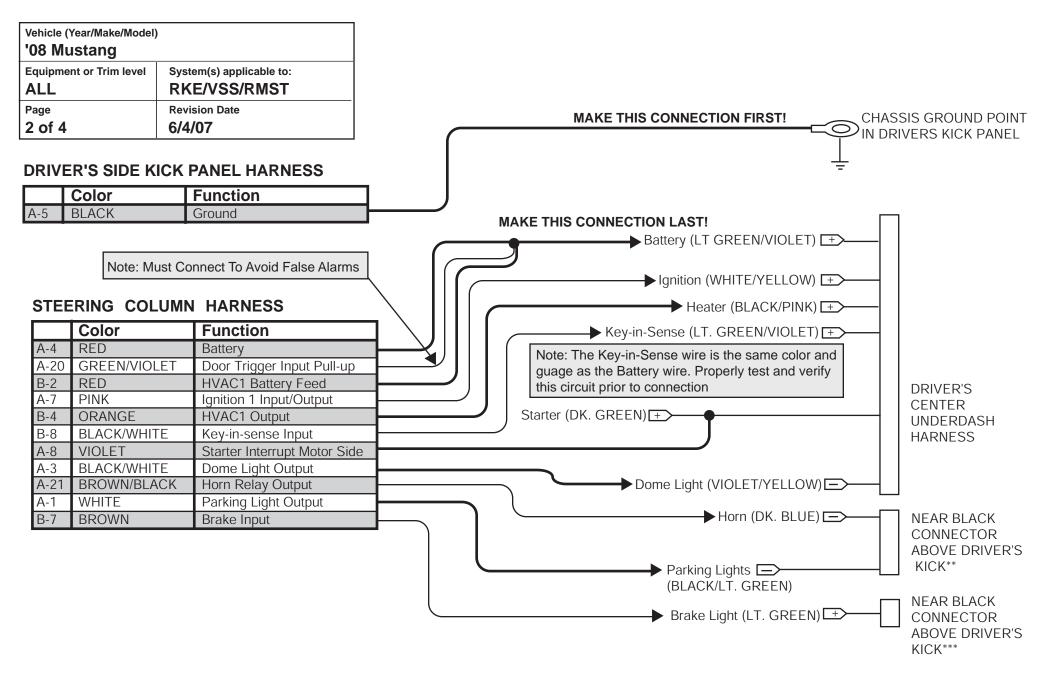


<sup>\*\*</sup> Wire is located inside wire loom running to black connector but does not terminate. Wire can be found 4" from connector on the side heading toward the rear of the vehicle in a looped fashion underneath bright green tape.

<sup>\*\*\*</sup> Wire is located inside wire loom running to black connector but does not terminate. Wire can be found 4" from connector on the side heading toward the bulkhead of the vehicle in a looped fashion underneath bright green tape.

Vehicle (Year/Make/Model) '08 Mustang	)	
Equipment or Trim level System(s) applicable to:  ALL RKE/VSS/RMST		
Page 3 of 4	Revision Date 6/4/07	

\*\*\* Wire is located inside wire loom running to black connector but does not terminate. Wire can be found 4" from connector on the side heading toward the bulkhead of the vehicle in a looped fashion underneath bright green tape.

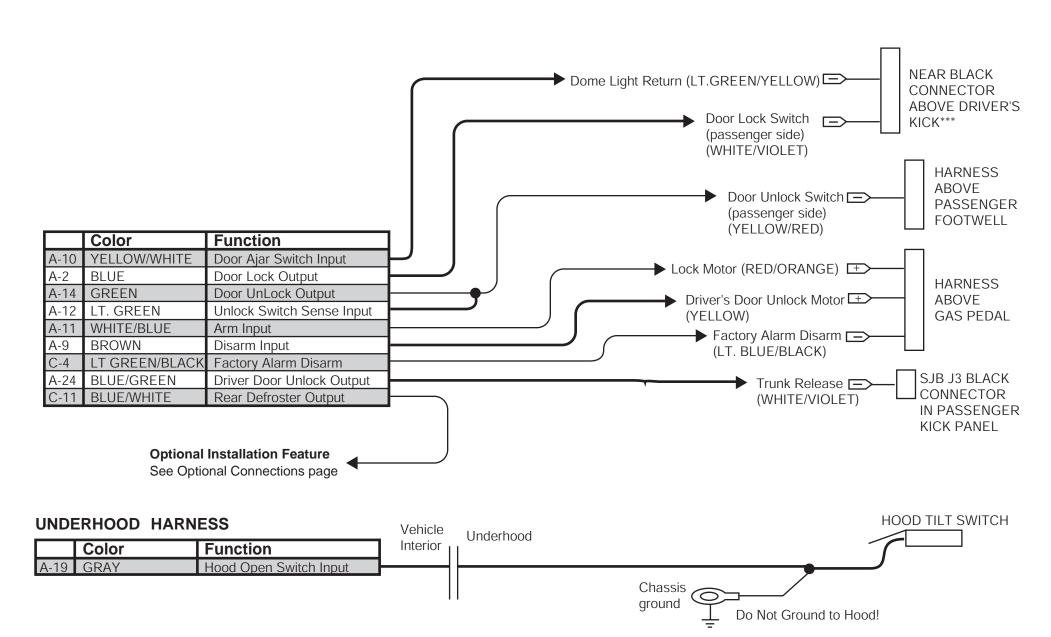


Vehicle (Year/Make/Model) '08 Mustang		
Equipment or Trim level System(s) applicable to:  ALL System(s) Applicable to:  RKE/VSS/RMST		
Page 4 of 4	Revision Date 6/4/07	

# **OPTIONAL CONNECTIONS / FEATURES**

#### **OPTION PROGRAMMING REQUIREMENTS**

#### **DRIVER'S DOOR PRIORITY UNLOCK**

BANK	OPTION	DESCRIPTION	LED
2	8	DRIVER UNLOCK RELAY	ON
3	1	DRIVER PRIORITY UNLOCK	ON

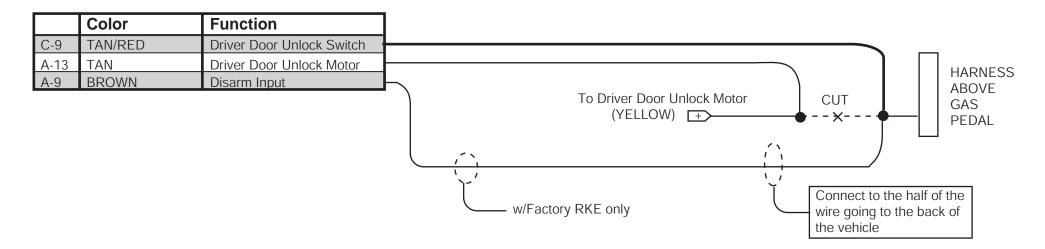


#### **REAR DEFROSTER**

	Color	Function
C-11	BLUE/WHITE	Rear Defroster Output

Vehicle (Year/Make/Model) '08 Mustang		
Equipment or Trim level	System(s) applicable to:	
Page 1 of 2	Revision Date 6/4/07	

# S197 SJB Layout (Front View)


FOUND IN PASSENGER KICK PANEL

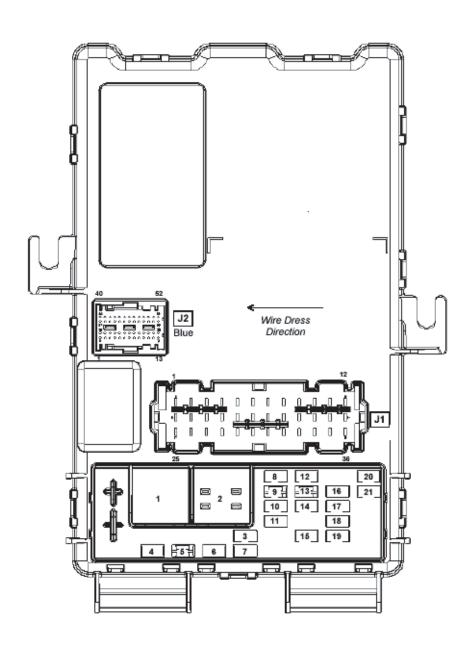


Vehicle (Year/Make/Model) '08 Mustang		
Equipment or Trim level	System(s) applicable to:	
Page 2 of 2	Revision Date 6/4/07	

# S197 SJB Layout (Back View)

FOUND IN PASSENGER KICK PANEL

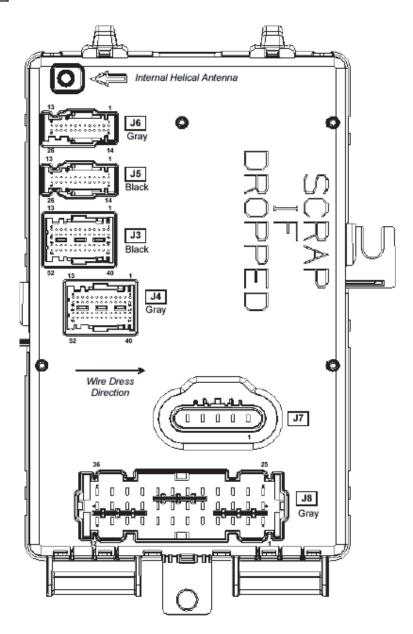

Vehicle (Year/Make/Model) '08 Mustang		
Equipment or Trim level System(s) applicable to:  ALL RMST		
Page	Revision Date	
1 of 2	6/4/07	

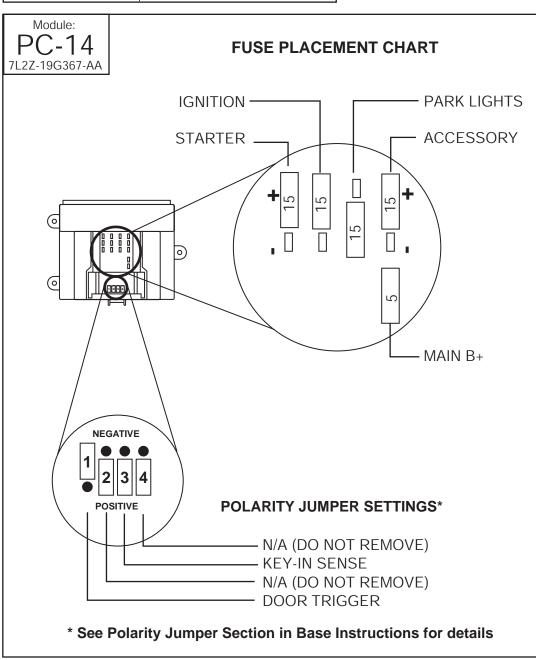

RMST Kit:

7L2Z-19G364-AA


Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - included)

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

#### MODULE MOUNTING LOCATION:

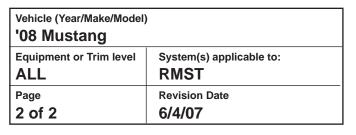

	Color	Function
A-3	PINK	Ignition Input/Output
A-2	ORANGE	HVAC Output
A-13	VIOLET	Starter Output
B-8	BLACK/WHITE	Key-in-sense Input
A-4	RED	Battery


	Color	Function
A-21	BROWN/BLACK	Horn Relay Output
A-1	WHITE	Parking Light Output

#### USE TYPE "A" CUSTOM WIRE HARNESS



	Horn (DK. BLUE)	NEAR BLACK CONNECTOR
<b>→</b>	Parking Lights (BLACK/LT. GREEN)	 ABOVE DRIVER'S KICK**

\*\* Wire is located inside wire loom running to black connector but does not terminate. Wire can be found 4" from connector on the side heading toward the rear of the vehicle in a looped fashion underneath bright green tape.

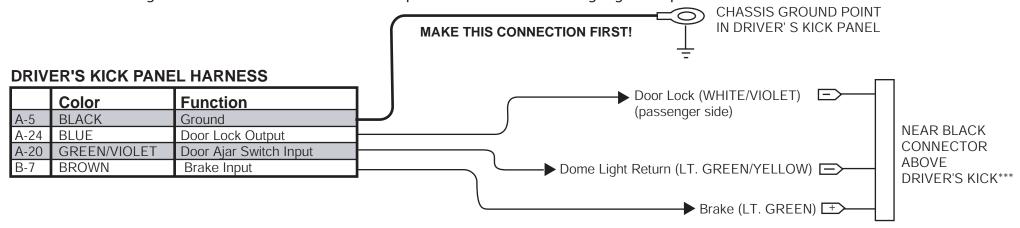


\*\*\* Wire is located inside wire loom running to black connector but does not terminate. Wire can be found 4" from connector on the side heading toward the bulkhead of the vehicle in a looped fashion underneath bright green tape.

#### **UNDER HOOD HARNESS**

			Vehicle	Engine		
	Color	Function	Interior	Compartment		Hood Tilt Switch
A-19	GRAY	Hood Open Switch Input			•	Tiood Till Switch
			'	1	Chassis	
					Ground Do Not Ground to Hood!	

Vehicle (Year/Make/Model) '08 Mustang		
Equipment or Trim level	System(s) applicable to: VSS	
Page 1 of 3	Revision Date 6/4/07	

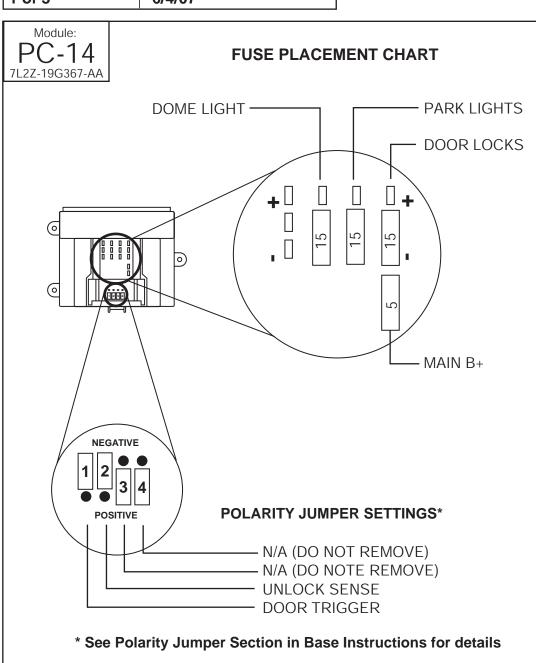

#### VSS Kit:

7L3Z-19A361-AA

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF

Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.


#### **MODULE MOUNTING LOCATION:**

Left Side of Driver's Underdash

#### NOTE:


IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

Vehicle (Year/Make/Model) '08 Mustang		
Equipment or Trim level	System(s) applicable to:	
Page 2 of 3	Revision Date 6/4/07	

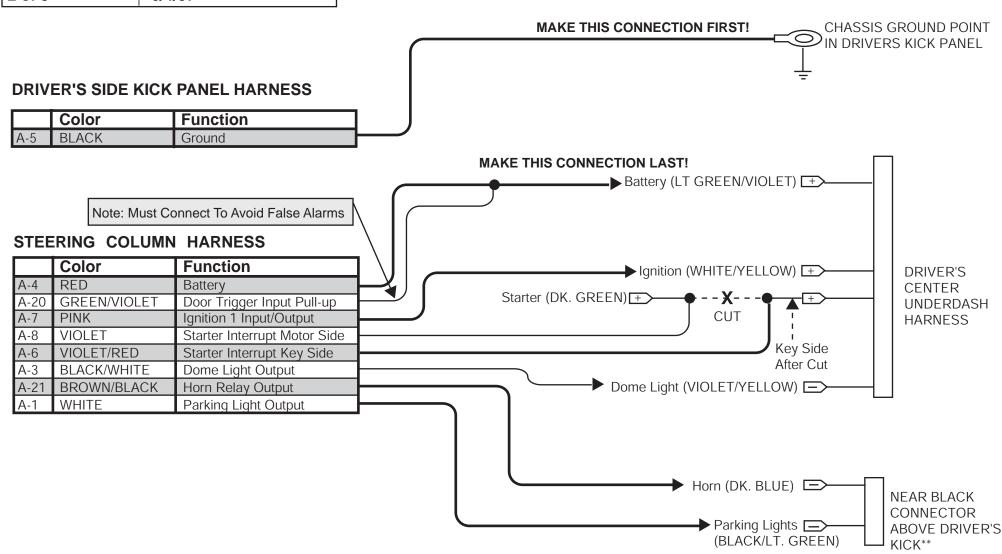


<sup>\*\*</sup> Wire is located inside wire loom running to black connector but does not terminate. Wire can be found 4" from connector on the side heading toward the rear of the vehicle in a looped fashion underneath bright green tape.

Vehicle (Year/Make/Model) '08 Mustang		
Equipment or Trim level	System(s) applicable to: VSS	
Page	Revision Date	
3 of 3	6/4/07	

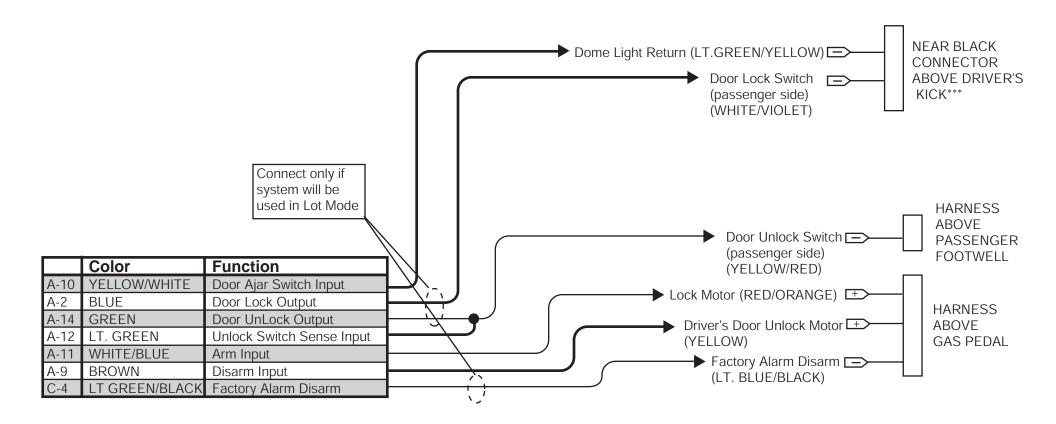

<sup>\*\*\*</sup> Wire is located inside wire loom running to black connector but does not terminate. Wire can be found 4" from connector on the side heading toward the bulkhead of the vehicle in a looped fashion underneath bright green tape.

Vehicle (Year/Make/Model) '08 MKZ		
Equipment or Trim level	System(s) applicable to: RMST	
Page 1 of 3	Revision Date 7/9/07	

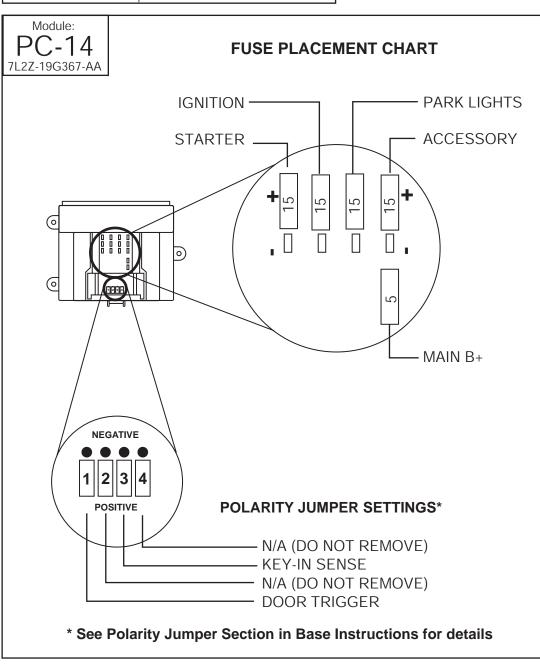

**RMST Kit:** 

7L2Z-19G364-AA


Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - included)

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

#### **MODULE MOUNTING LOCATION:**

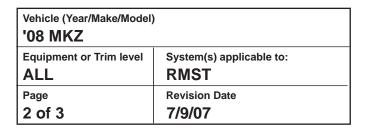

		Color	Function
F	4-3	PINK	Ignition Input/Output
A	4-2	ORANGE	HVAC Output
A	4-13	VIOLET	Starter Output
E	3-8	BLACK/WHITE	Key-in-sense Input
1	4-4	RED	Battery


		Function
A-21	BROWN/BLACK	Horn Relay Output

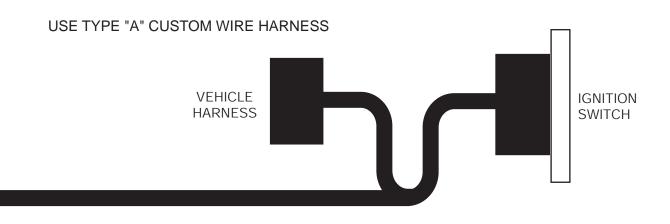



**DRIVERS** 

KICK PANEL

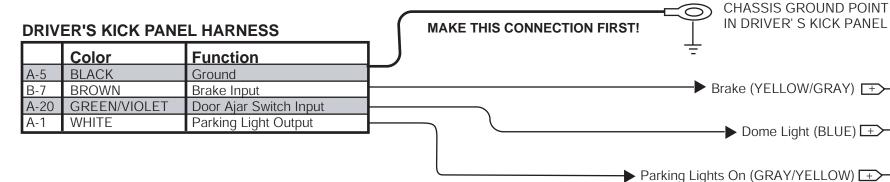


#### **UNDER HOOD HARNESS**


ONDER HOOD HARRIESS			Vehicle Engine				
	Color	Function	Interior	3		Hood Tilt Switch	
A-19	GRAY	Hood Open Switch Input			•	HOOQ TIIL SWILCH	
			I	I	Chassis		
					Ground Do Not Ground to Hoo	d!	

Vehicle (Year/Make/Model) '08 MKZ		
Equipment or Trim level	System(s) applicable to:	
Page 3 of 3	Revision Date 7/9/07	

(SJB)

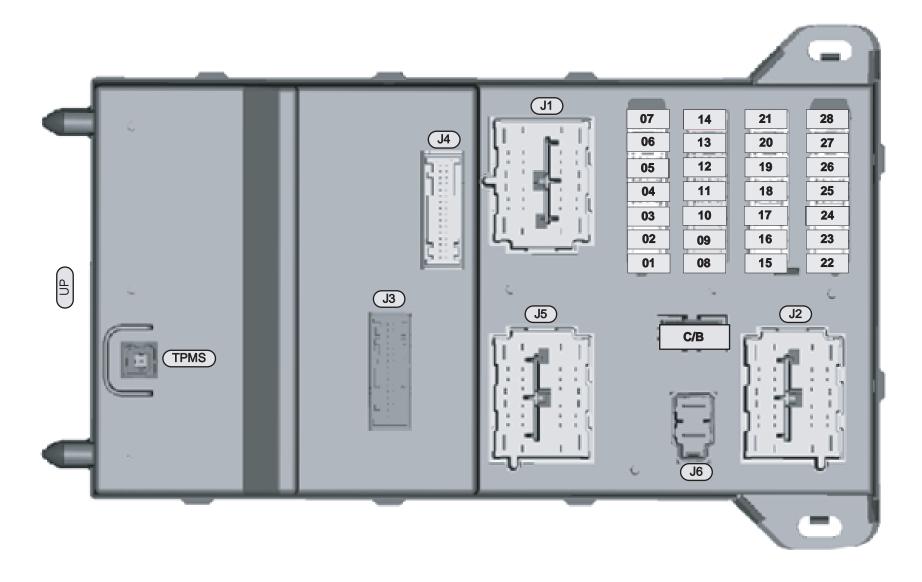

Vehicle (Year/Make/Model) '08 Fusion / Milan		
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST	
Page 1 of 4	Revision Date 7/9/07	

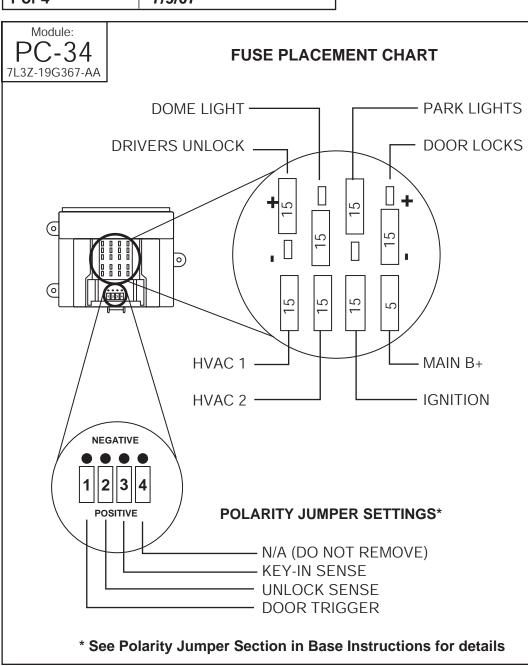

IMPORTANT: This Series 200 kit is NOT recommended for installation on this vehicle because the alarm system will trigger if the Integrated Keyfob is used to open the trunk/liftgate without disarming the Series 200 system first. Therefore, it is highly recommended to install the Series 100 system (7L2Z-19G364-AA) instead, which is not equipped with perimeter security.

#### PARTS REQUIRED:

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

#### Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

Note 2: See the Optional Connections / Features page


#### **MODULE MOUNTING LOCATION:**

Vehicle (Year/Make/Model) '08 Fusion / Milan			
Equipment or Trim level System(s) applicable to:  ALL RKE/VSS/RMST			
Page 2 of 4	Revision Date 7/9/07		

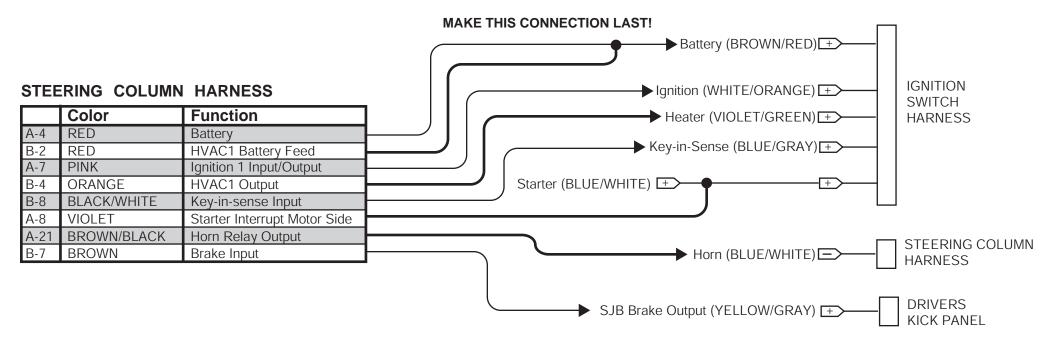



Vehicle (Year/Make/Model) '08 Fusion / Milan		
Equipment or Trim level System(s) applicable to:  ALL RKE/VSS/RMST		
Page 3 of 4	Revision Date 7/9/07	

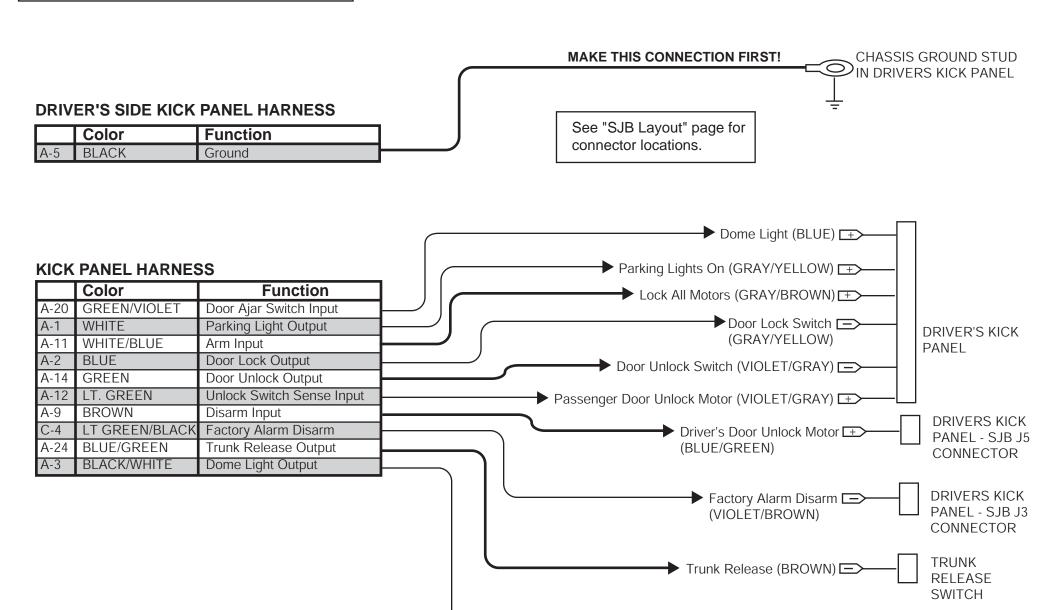

**DIMMER** 

**SWITCH** 

Dome Light (GREEN/BLUE)


Vehicle (Year/Make/Model) '08 Fusion / Milan		
Equipment or Trim level System(s) applicable to:  ALL RKE/VSS/RMST		
Page 4 of 4	Revision Date <b>7/9/07</b>	

# **OPTIONAL CONNECTIONS / FEATURES**

#### **OPTION PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
2	8	DRIVER UNLOCK RELAY	ON
3	1	DRIVER PRIORITY UNLOCK	ON


#### **DRIVER'S DOOR PRIORITY UNLOCK**

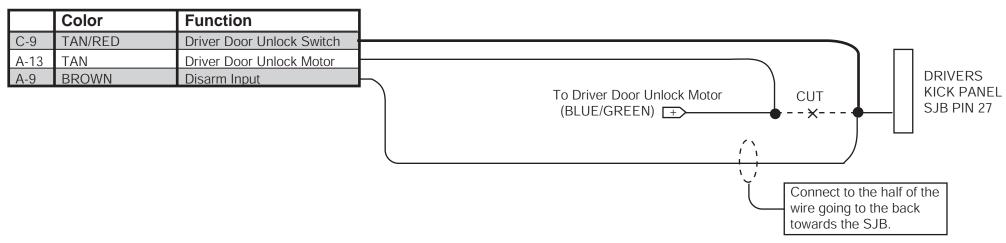

#### **HEADLIGHTS/REAR DEFROSTER**

	Color	Function
C-10	RED/WHITE	Headlight Output
C-11	BLUE/WHITE	Rear Defroster Output

Vehicle (Year/Make/Model) '08 Fusion / Milan		
Equipment or Trim level System(s) applicable to:  ALL RMST		
Page 1 of 2	Revision Date 7/9/07	

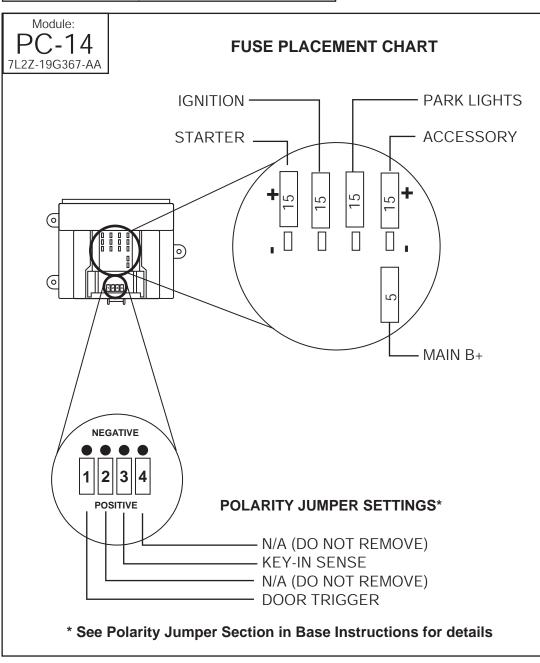

**RMST Kit:** 

7L2Z-19G364-AA


Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - included)

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

#### **MODULE MOUNTING LOCATION:**

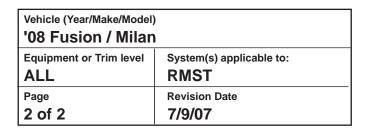

ı		Color	Function	
ı	A-3	PINK	Ignition Input/Output	
ı	A-2	ORANGE	HVAC Output	
ı	A-13	VIOLET	Starter Output	
ı	B-8	BLACK/WHITE	Key-in-sense Input	
ı	A-4	RED	Battery	

	Color	Function
A-21	BROWN/BLACK	Horn Relay Output





CHASSIS GROUND POINT IN DRIVER'S KICK PANEL


**DRIVERS** 

KICK PANEL

▶ Door Lock (GRAY/YELLOW)

→ Parking Lights On(GRAY/YELLOW) =>

亖

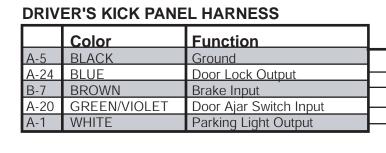


#### UNDER HOOD HARNESS

ONDE	UNDER HOOD HARNESS		Vehicle Engine			
	Color	Function	Interior	Compartment		Hood Tilt Switch
A-19	GRAY	Hood Open Switch Input			•	HOOD THE SWILCH
			ı	1	Chassis	
					Ground Do Not Ground to Hood	

**MAKE THIS CONNECTION FIRST!** 

Vehicle (Year/Make/Model) '08 Fusion / Milan			
Equipment or Trim level System(s) applicable to: VSS			
Page 1 of 2	Revision Date 7/9/07		

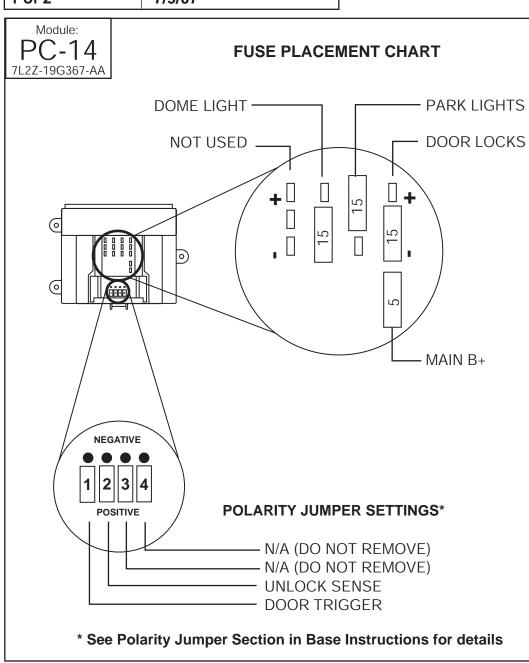

#### **VSS Kit:**

7L3Z-19A361-AA

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

#### MODULE MOUNTING LOCATION:

Left Side of Driver's Underdash


#### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

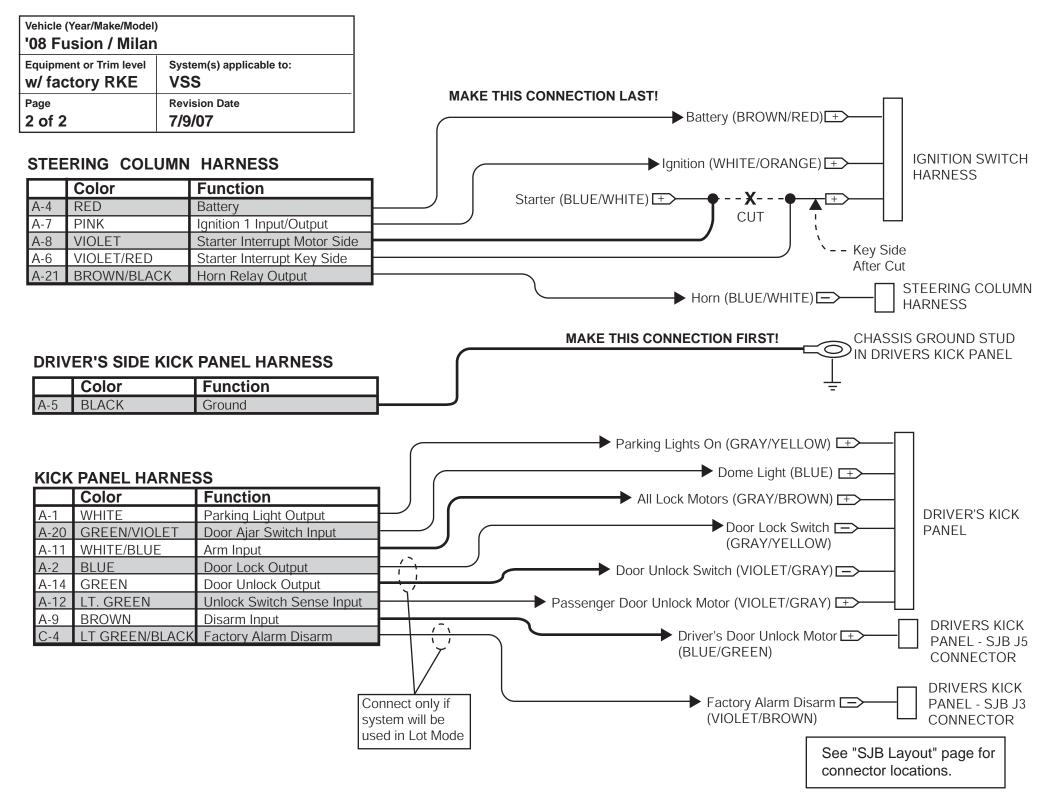


Vehicle (Year/Make/Model) '08 Fusion / Milan			
Equipment or Trim level	System(s) applicable to:		
Page 1 of 1	Revision Date 7/9/07		

(SJB)

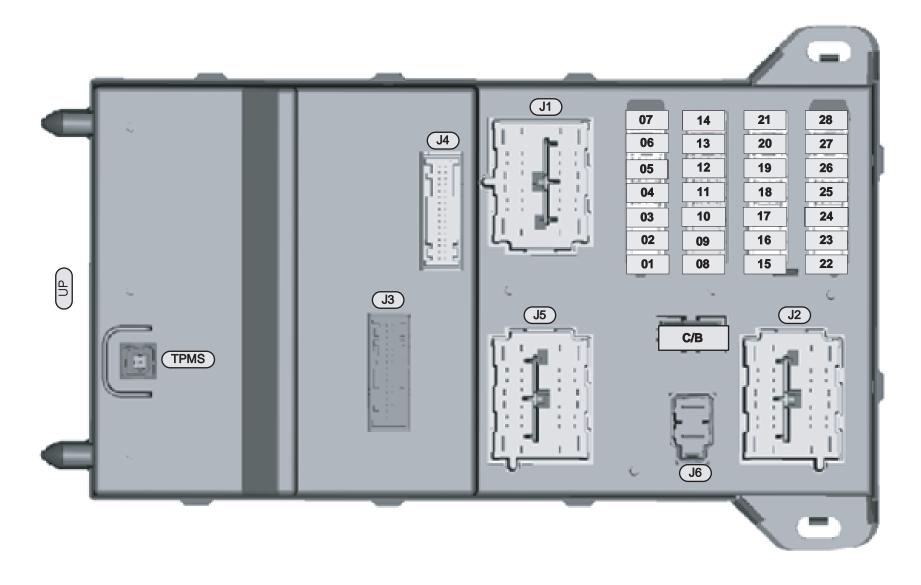

Vehicle (Year/Make/Model) '08 Focus		
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST	
Page 1 of 4	Revision Date 8/10/07	

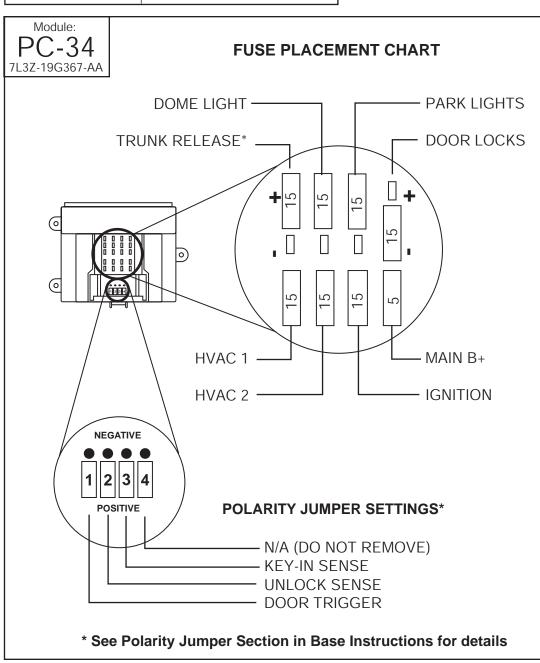

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

#### Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)

#### RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):


- 1- Driver's Door Priority Unlock (optional)
- 1- Headlights (optional)


#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON


- Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.
- Note 2: See the Optional Connections / Features page

#### MODULE MOUNTING LOCATION:

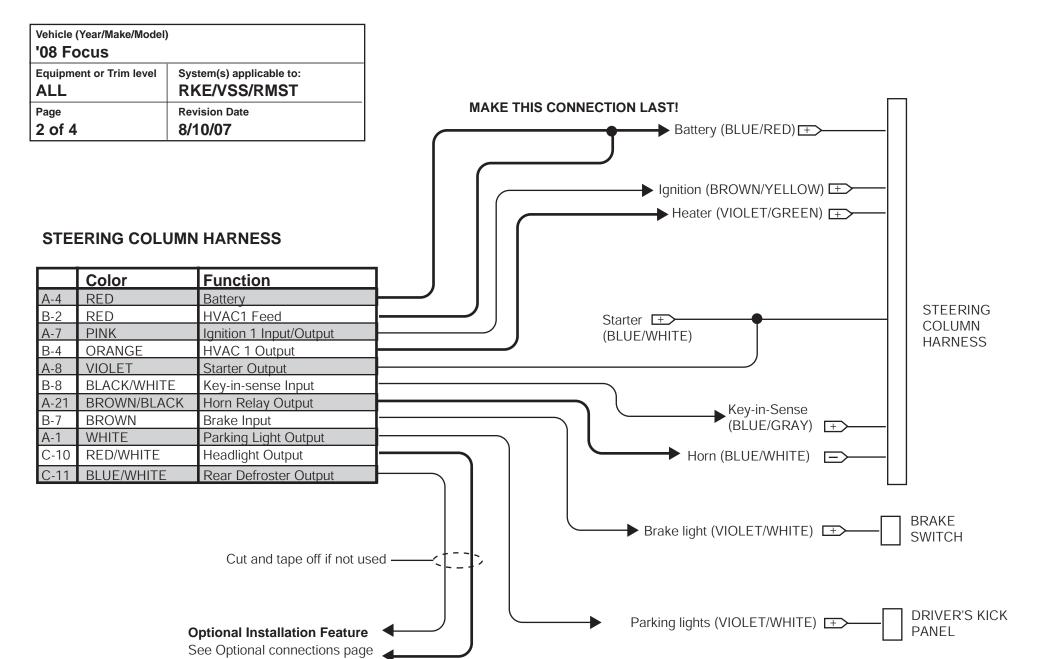

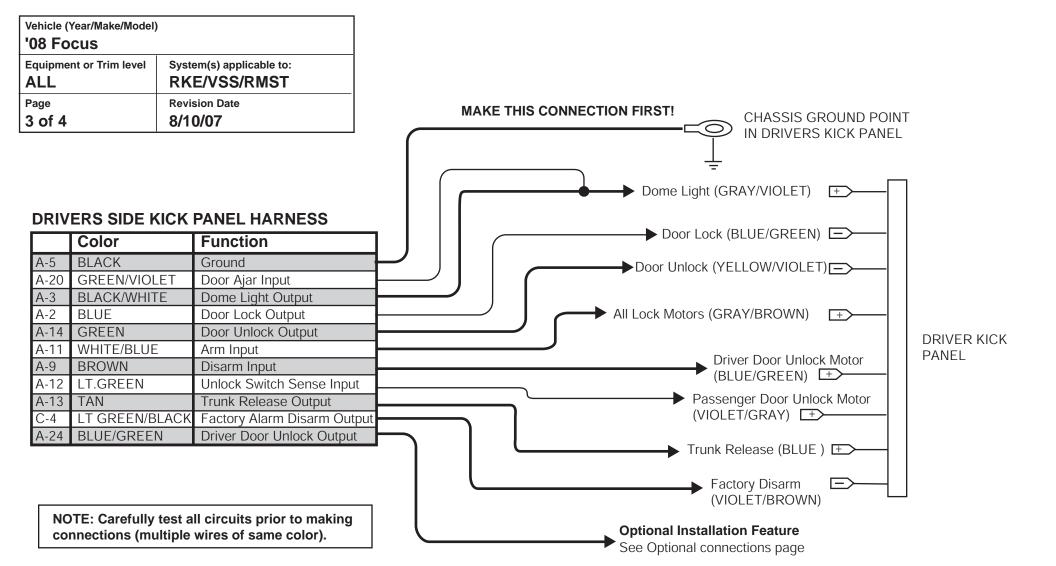

#### **UNDERHOOD HARNESS**



Vehicle (Year/Make/Model) '08 Focus	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 4 of 4	Revision Date 8/10/07

# **OPTIONAL CONNECTIONS / FEATURES**

#### **OPTION PROGRAMMING REQUIREMENTS**


Relays shown are not supplied in kit. Relays are available by ordering Ford part number YL3Z-19G390-AA (Single) or YL3Z-19G390-BA (10 pack).

# DRIVER'S DOOR PRIORITY UNLOCK


	Color	Function
A-24	BLUE/GREEN	Driver Door Unlock Output
A-9	BROWN	Disarm Input

#### **IMPORTANT!**


The relay wire colors shown here, are the colors used on the FORD accessory relay kits listed above. Wire colors on other relays may be different!

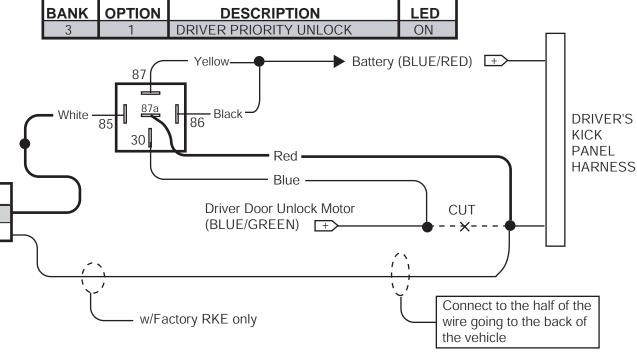

#### **HEADLIGHT ILLUMINATION / REAR DEFROSTER**

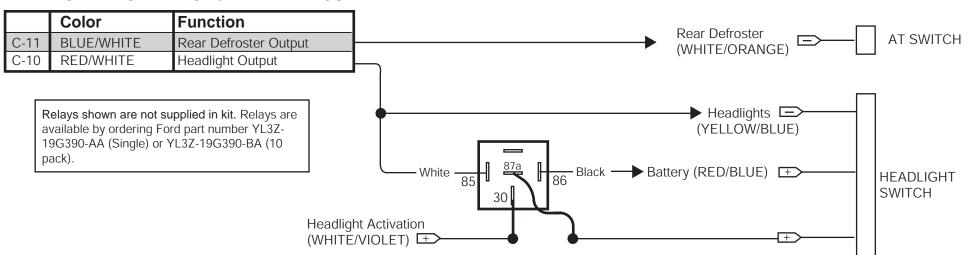

Vehicle (Year/Make/Model) '08 Focus		
Equipment or Trim level	System(s) applicable to:	
Page 1 of 2	Revision Date 8/10/07	

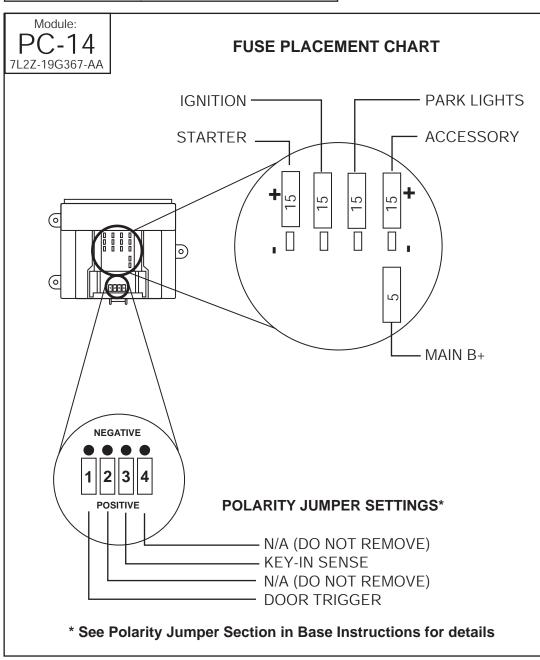

RMST Kit:

7L2Z-19G364-AA

Securilock (PATS) Interface:


PIK-4 (P/N: 7L2Z-19G365-AA - included)

**RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):** 

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON

#### **MODULE MOUNTING LOCATION:**

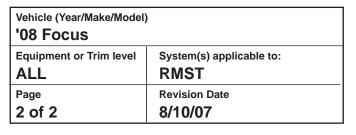

	Color	Function
A-3	PINK	Ignition Input/Output
A-2	ORANGE	HVAC Output
A-13	VIOLET	Starter Output
B-8	BLACK/WHITE	Key-in-sense Input
A-4	RED	Battery

	Color	Function
A-21	BROWN/BLACK	Horn Relay Output
A-1	WHITE	Parking Light Output


# VEHICLE HARNESS VEHICLE HARNESS



CHASSIS GROUND POINT IN DRIVER'S KICK PANEL

# Color Function


	Color	Function
A-5	BLACK	Ground
A-24	BLUE	Door Lock Output
B-7	BROWN	Brake Input
A-20	GREEN/VIOLET	Door Ajar Switch Input

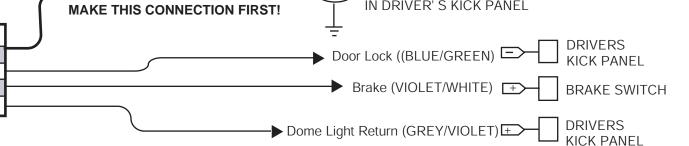

# **UNDER HOOD HARNESS**

ONDER 1100D 11/1/1/1200		Vehicle	Engine			
	Color	Function	Interior	Compartment	Hood Tilt Swit	ch
A-19	GRAY	Hood Open Switch Input			Hood Till Swit	CH
			1	ı	Chassis	
					Ground Do Not Ground to Hood!	
					<del>-</del>	

Vehicle (Year/Make/Model) '08 Focus	
Equipment or Trim level	System(s) applicable to: VSS
Page 1 of 2	Revision Date 8/10/07

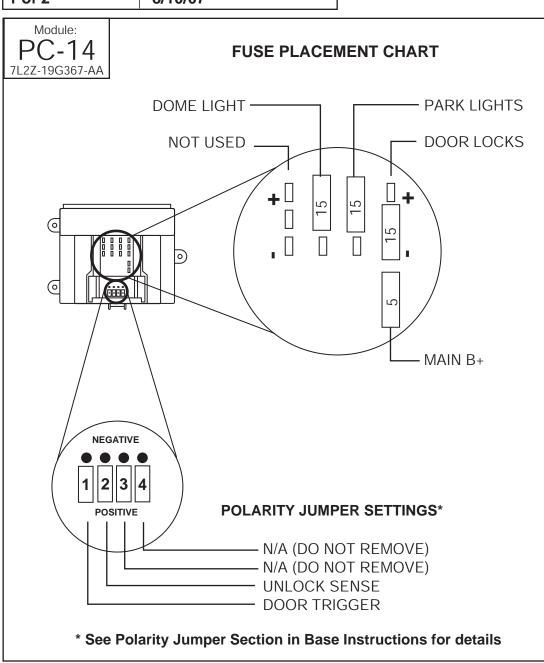

**VSS Kit:** 

7L3Z-19A361-AA

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

#### **MODULE MOUNTING LOCATION:**


Left Side of Driver's Underdash

#### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

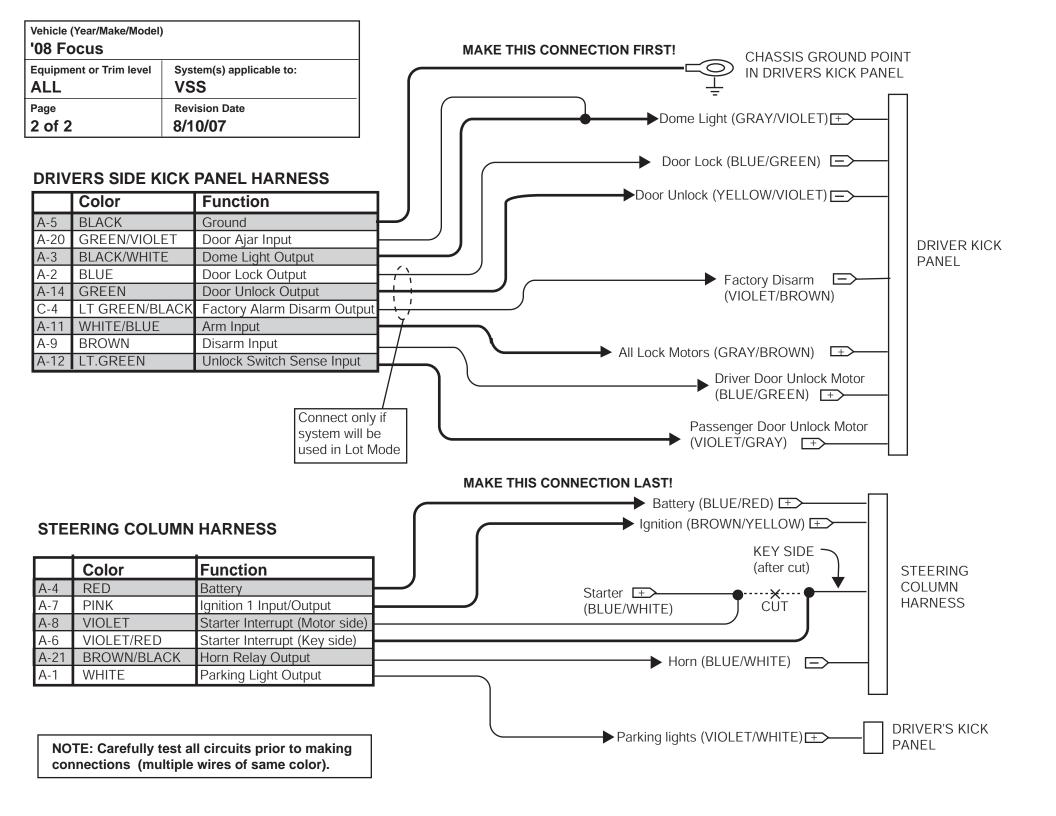

Vehicle (Year/Make/Model) '08 Taurus/ Tauru	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 1 of 5	Revision Date 8/13/07

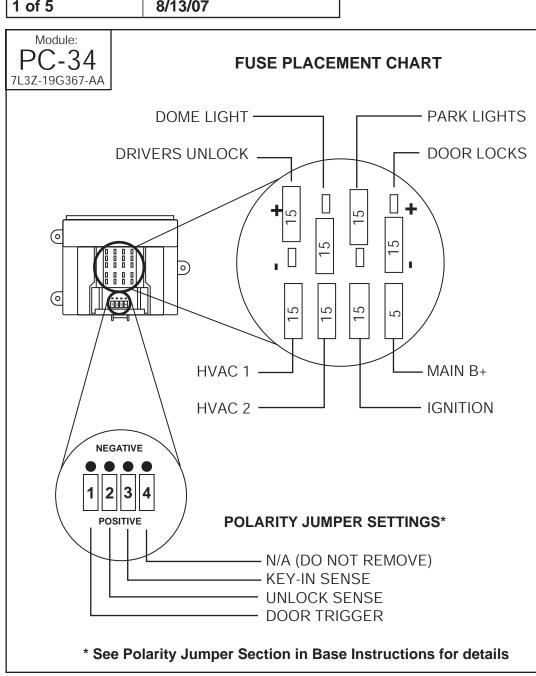

#### **RKE/VSS/RMST Kit:**

7L3Z-19G364-AA

#### Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - order separately)

#### **RELAY REQUIREMENTS (P/N YL3Z-19G390-AA):**

1- Liftglass Release (optional)

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	4	DOOR AJAR INVERT	ON
1	5	UNLOCK SENSE INVERT	ON
1	6	KEY-IN SENSE INVERT	ON
2	1	STARTER INTERRUPT	OFF
2	8	DRIVER UNLOCK RELAY	note 2
3	1	DRIVER PRIORITY UNLOCK	note 2
4	1	TACHLESS MODE	ON


Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.


Note 2: See the Optional Connections / Features page

#### **MODULE MOUNTING LOCATION:**

Vehicle (Year/Make/Model) '08 Taurus/ Tauru	' I
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 2 of 5	Revision Date 8/13/07

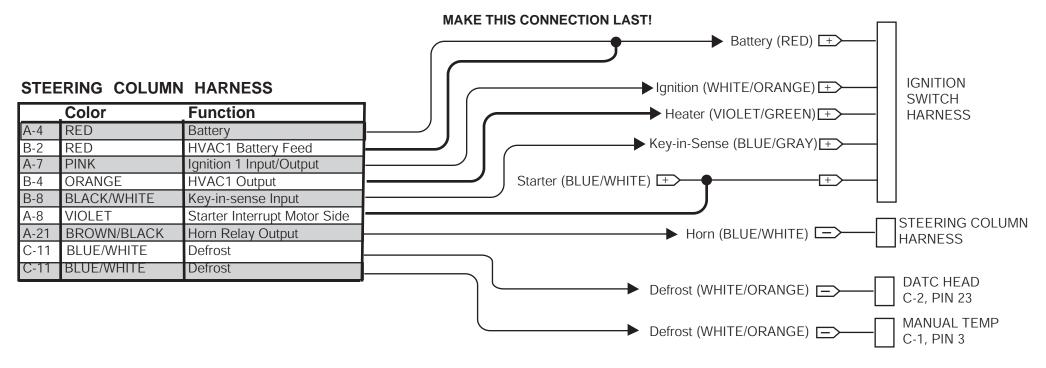

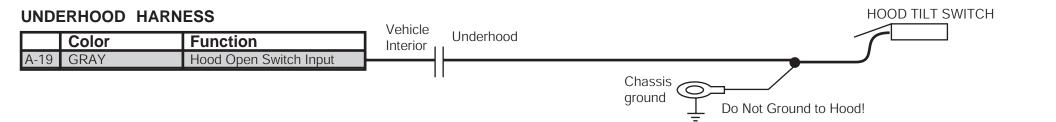

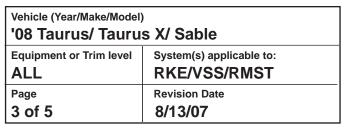


#### **DRIVER'S SIDE KICK PANEL HARNESS**

ı		Color	Function
	A-5	BLACK	Ground

#### **KICK PANEL HARNESS**

	Color	Function
B-7	BROWN	Brake Input
A-20	GREEN/VIOLET	Door Ajar Switch Input
A-11	WHITE/BLUE	Arm Input
A-2	BLUE	Door Lock Output
A-14	GREEN	Door Unlock Output
A-9	BROWN	Disarm Input
C-4	GREEN/VIOLET	Factory Alarm Disarm
A-12	LT. GREEN	Unlock Switch Sense Input
A-24	BLUE/GREEN	Driver Door Unlock Output

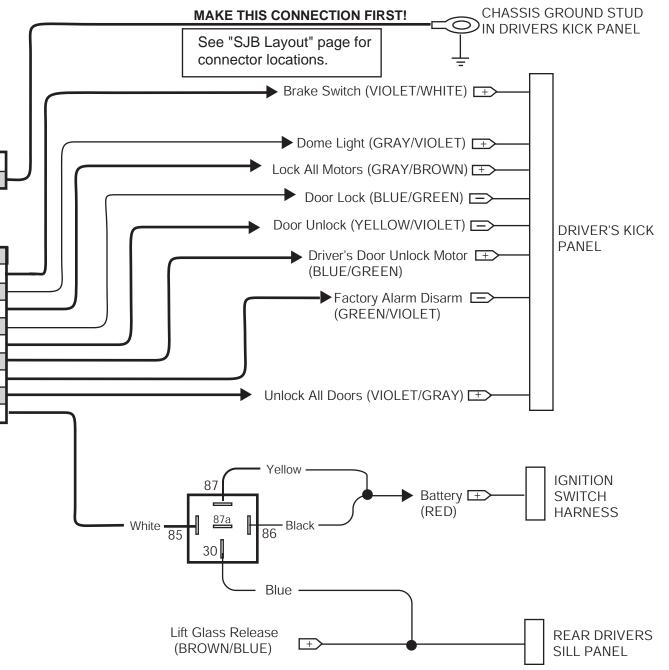


Vehicle (Year/Make/Model)	
'08 Taurus/ Tauru	s X/ Sable
Equipment or Trim level	System(s) applicable to:
ALL	RKE/VSS/RMST
Page	Revision Date
4 of 5	8/13/07


#### **HEADLAMP SWITCH HARNESS**

	Color	Function			0.15
A-1	WHITE	Parking Light Output	 Parking Lights On		SJB J5 CONNEC
			(VIOLET/WHITE)	Ш	PIN 6

#### **DOMELIGHT HARNESS**



#### TRUNK RELEASE HARNESS

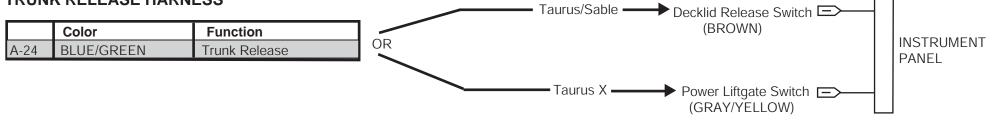


Vehicle (Year/Make/Model) '08 Taurus/ Tauru	
Equipment or Trim level	System(s) applicable to: RKE/VSS/RMST
Page 5 of 5	Revision Date 8/13/07

# **OPTIONAL CONNECTIONS / FEATURES**

#### **OPTION PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
2	8	DRIVER UNLOCK RELAY	ON
3	1	DRIVER PRIORITY UNLOCK	ON

#### **DRIVER'S DOOR PRIORITY UNLOCK**

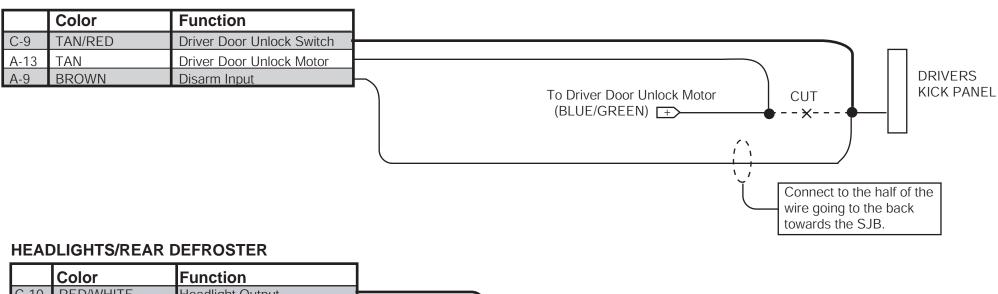

	Color	Function
C-10	RED/WHITE	Headlight Output

Vehicle (Year/Make/Model) '08 Taurus/ Taurus X/ Sable		
Equipment or Trim level	System(s) applicable to: RMST	
Page 1 of 2	Revision Date 8/13/07	

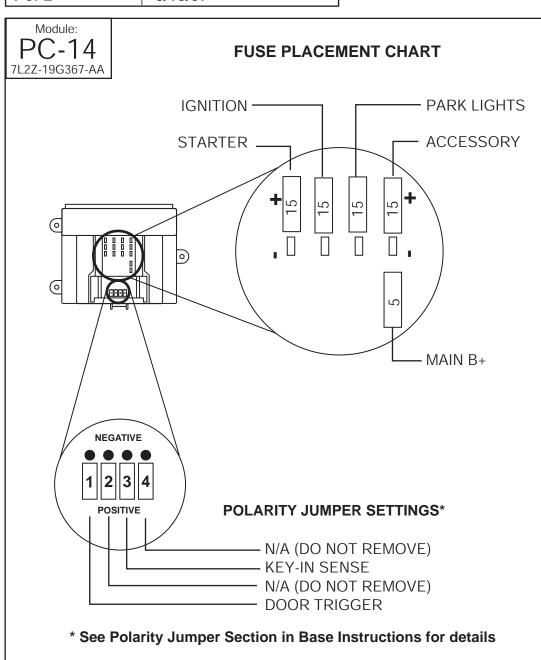

**RMST Kit:** 

7L2Z-19G364-AA


Securilock (PATS) Interface:

PIK-4 (P/N: 7L2Z-19G365-AA - included)

# **FUNCTIONAL PROGRAMMING REQUIREMENTS**


BANK	OPTION	DESCRIPTION	LED
1	2	DOOR AJAR INVERT	ON
1	3	KEY-IN SENSE INVERT	ON
2	1	TACHLESS MODE	ON


#### **MODULE MOUNTING LOCATION:**

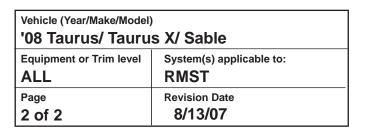


	Color	Function
A-3	PINK	Ignition Input/Output
A-2	ORANGE	HVAC Output
A-13	VIOLET	Starter Output
B-8	BLACK/WHITE	Key-in-sense Input
A-4	RED	Battery

Color		Function
A-21	BROWN/BLACK	Horn Relay Output

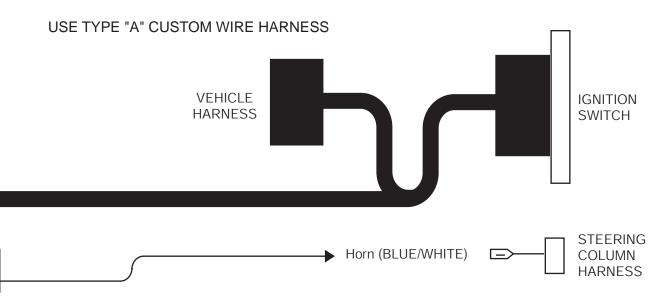

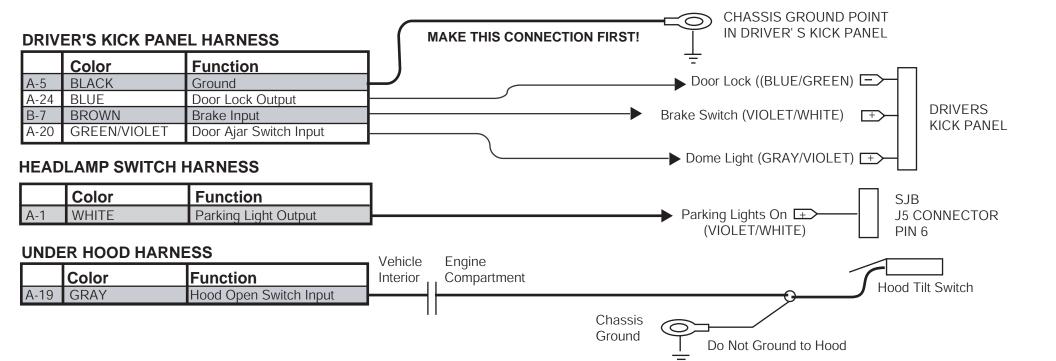

Vehicle (Year/Make/Model) '08 Taurus/ Taurus X/ Sable	
Equipment or Trim level	System(s) applicable to:
Page 1 of 2	Revision Date 8/13/07

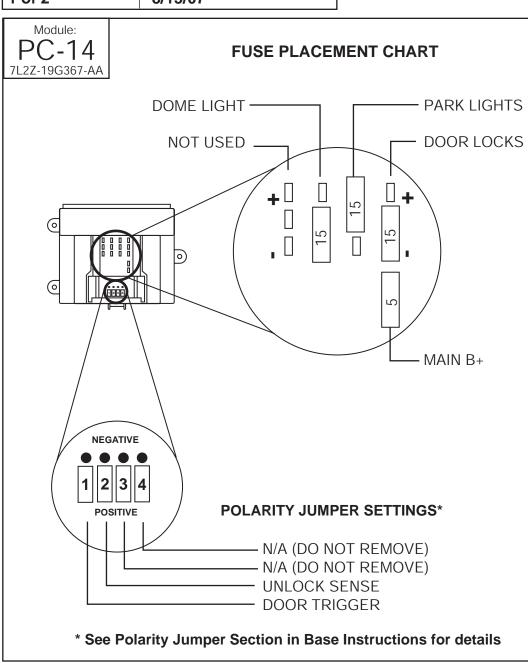

#### **VSS Kit:**

7L3Z-19A361-AA

#### **FUNCTIONAL PROGRAMMING REQUIREMENTS**

BANK	OPTION	DESCRIPTION	LED
1	1	LITE TOUCH ADJUSTMENT	note 1
1	2	FULL SHOCK ADJUSTMENT	note 1
1	3	DOOR AJAR INVERT	ON
1	4	UNLOCK SENSE INVERT	ON
2	1	STARTER INTERRUPT	ON

Note 1: Perform proper adjustments per the "Shock Sensor Setting" section of the Base instruction sheets.

#### MODULE MOUNTING LOCATION:

Left Side of Driver's Underdash

#### NOTE:

IF USING THIS SYSTEM IN LOT MODE, WIRE HARNESS P/N 2W7Z-19C757-BA WILL HAVE TO BE ORDERED TO ACCESS THE 'FACTORY DISARM OUTPUT" WIRE (LT.GREEN/BLACK).

